
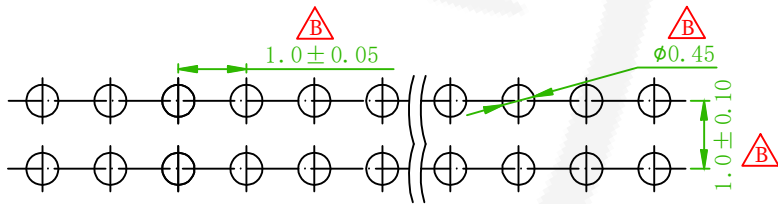
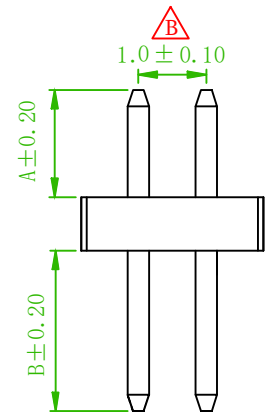
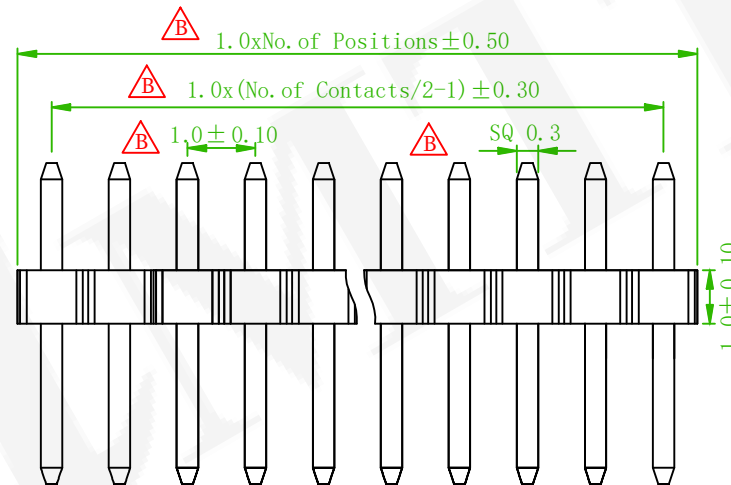


MATERIAL

Insulator: Nylon 9T,UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5	P	H	5	S	D	A	1	0	-	2	X	X	X	X	X	X	X	U	-	A/B/000	-	0	0				
2: Dual Row				No. of contacts Per Row(02~50)				G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated				S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"				N: Non Type N: W/O Peg				RoHS X: Box B: Bag T: Tube W/O Cap				EX: 030020000 A: 3.0 B: 2.0			

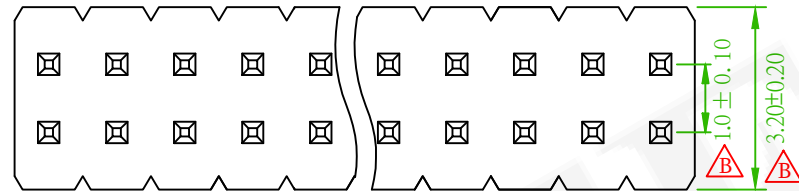

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH5S10-2XX-U

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
	品號 PART NO.	5PH5SDA10-2XXXXXXXU -XXXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/08
	圖號 DRAWING NO.	GN016-GA311	版本 REV.	C	核對 CHECKED	Johnny 2016/09/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/08	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	ECN NO.:230805 Revise the drawing	Alice	2023/08/25
	Modify dimension, order information, specification	B	2017/03/22 Gary