

MATERIAL

Insulator: Nylon 9T,UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH6DDA14-2XXXX-U-A/L1/B-00

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD:30u"

N:W/O Peg

N:Non Type

RoHS

EX:027083027
A:2.7(027)
L1:8.3(083)
B:2.7(027)


X:Box
B:Bag
T:Tube, W/O Cap
C:Tube, With Cap
H :Tape & Reel, W/O Cap
R:Tape & Reel,With Cap





AMTEK 耀德

2023.09.19

Released DCC

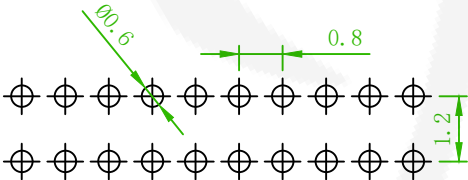

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

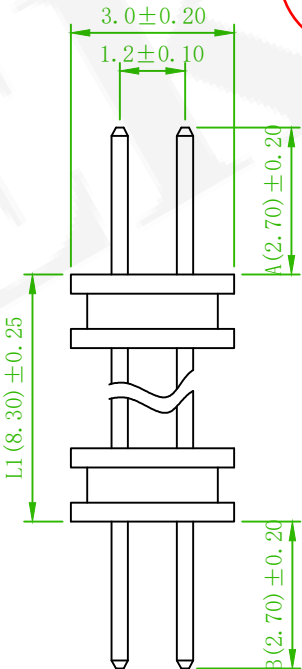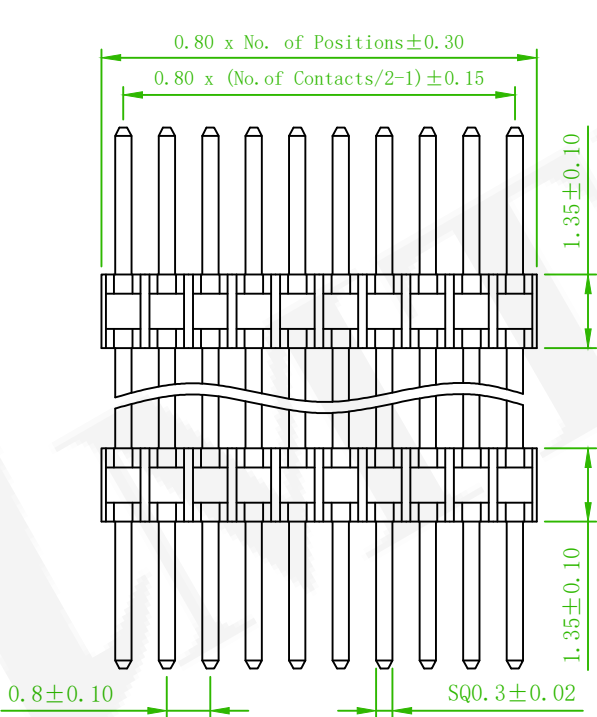

Old Part No. : PH6D14-2XX-U

△x1	ECN NO.:230804 Revise the drawing	Alice	2023/08/22
△x1	ECN No.:210619 Cancel the top view	Alice	2021/09/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER0.8mm				頁數 Page	1/1
品號 PART NO.	5PH6DDA14-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Erin 2015/08/14
圖號 DRAWING NO.	GN016-JS011	版本 REV.	C	核對 CHECKED	John 2015/08/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		