

MATERIAL
Insulator: Nylon 9T,UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH6DMA14-2XX-XX



X

X

X

U

-

A/L1/B

-

0

0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

S: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

T: Tin Plated

TE: Tin 200u"

N: Non Type

N: W/O Peg

P: With Peg

U: RoHS Hi-Temp.


R: T/R With Cap

C: Tube With Cap



EX: 028046046
A: 2.80(028)
L1: 4.60(046)
B: 4.60(046)



AMTEK 耀德
2023.09.19
Released DCC

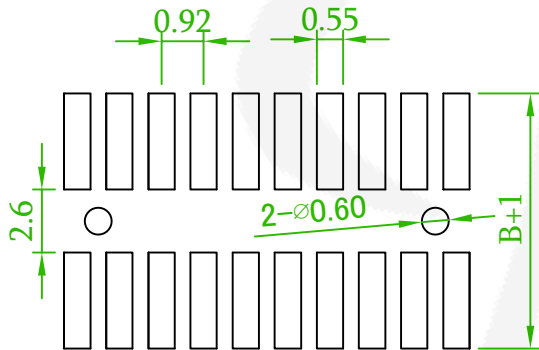

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

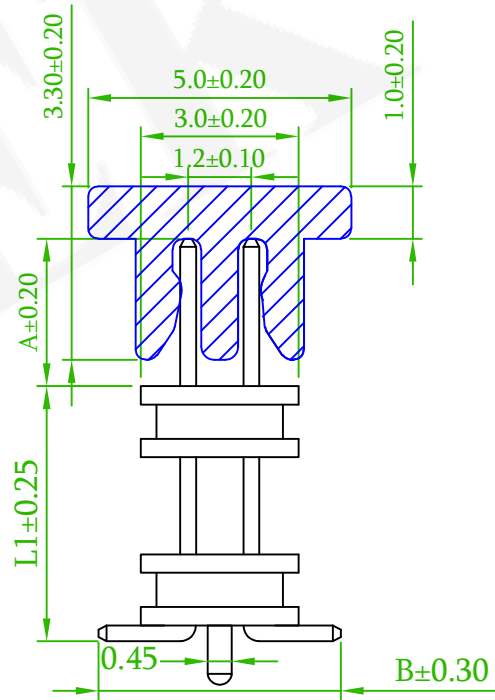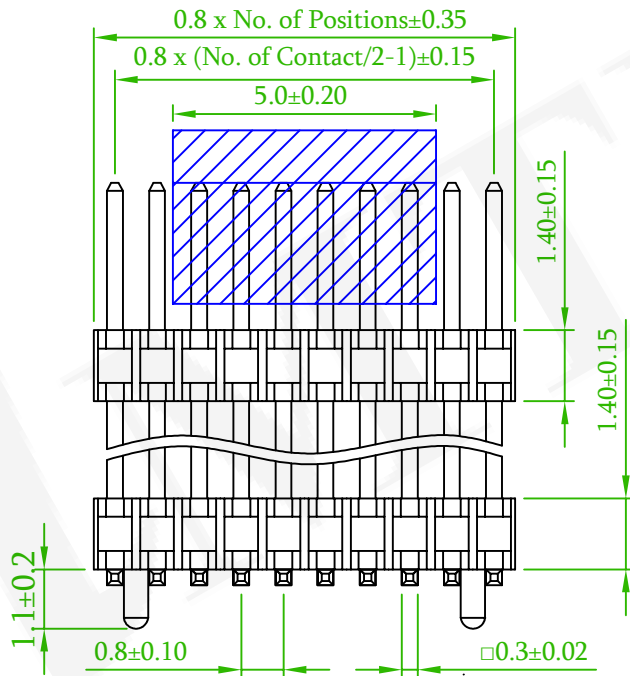

Old P/N :PH6DM14-2XX-U

△x1	ECN NO.:230804 Revise the drawing	Alice	2023/08/22
△x1	ECN No.:210619 Cancel the top view	Alice	2021/09/22
△x1	Add the Peg	Andy	2018/03/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER PITCH 0.8mm				頁數 Page	1/1
品號 PART NO.	5PH6DMA14-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Sinnys 2011/05/05
圖號 DRAWING NO.	GN016-GA002	版本 REV.	D	核對 CHECKED	Kelvin 2011/05/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2011/05/05	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		