

MATERIAL

Insulator: Nylon 9T,UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 6 M S B 1 4 - 2 X X X X

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash	S0: Selective
GA: 5u"	SA: 5u"
GB: 10u"	SB: 10u"
GC: 20u"	SC: 20u"
GD: 30u"	SD: 30u"
T0: Tin Plated	
TE: Tin 200u"	

N: W/O Peg
P: With Peg

N: Non

U: RoHS
+Hi-Temp.


EX: 028046018
A: 2.8(028)
B: 4.6(046)
C: 1.8(018)

R: T/R With Cap



H: T/R W/O Cap

C: Tube With Cap

T: Tube W/O Cap

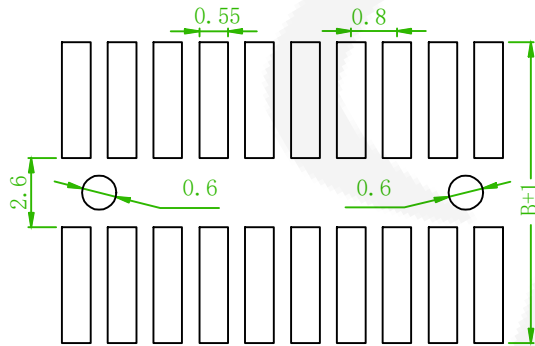

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

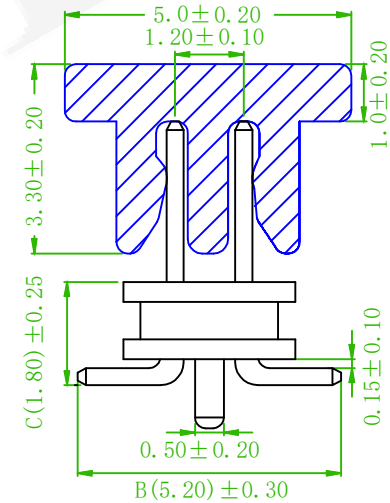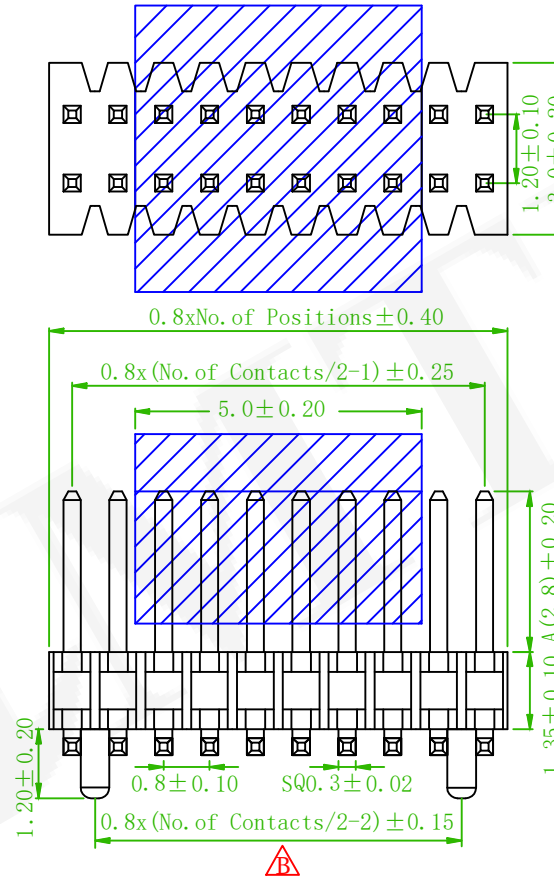

Old Part No. : PH6M14-2XX-U

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 0.8mm				頁數 Page	1/1
	品號 PART NO.	5PH6MSB14-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2017/02/16
	圖號 DRAWING NO.	GN110-MC288	版本 REV.	C	核對 CHECKED	Jonny 2017/02/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/02/16	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x1	ECN NO.: 230804 Revise the drawing	Alice	2023/08/22
△x1	Revise the drawing	Alice	2020/10/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE