


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 8 D M A 2 5 - 1 X X X X X X U - A/L1/B - 0 0

1:Single Row	No. of contacts Per Row(02~20)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	A:A Type (Odd & Even Type) B:B Type (Only Even Type)	X:Box B:Bag T:Tube, W/O Cap(5 Pin ↑) C:Tube, With Cap(5 Pin ↑) H :Tape & Reel, W/O Cap R:Tape & Reel,With Cap	EX:040100040 A:4.0(040) L1:10.0(100) B:4.0(040)
--------------	-----------------------------------	---	---	-----------	---	--	--

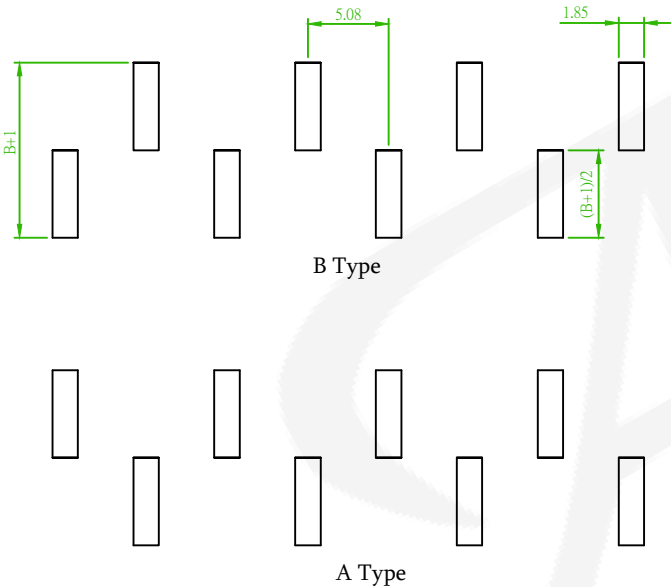

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

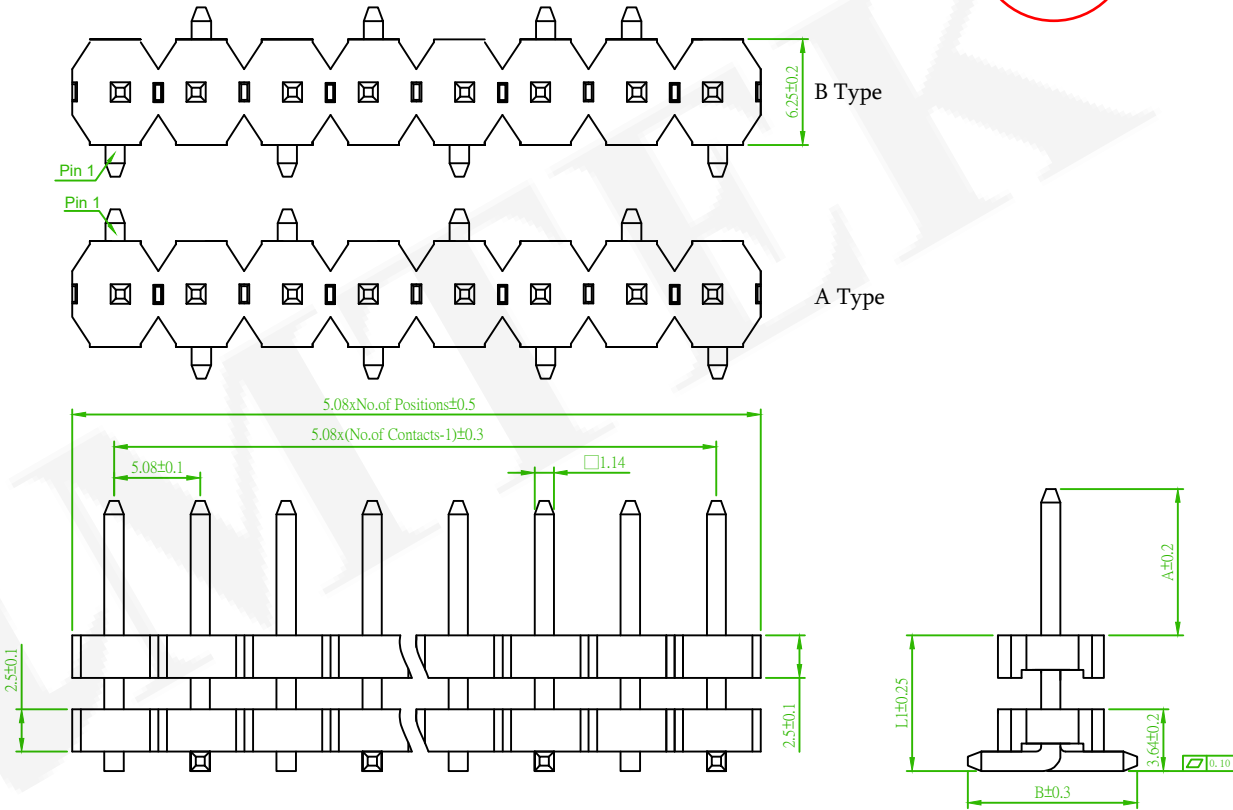

Old Part No. : PH8DM25-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 5.08mm				頁數 Page	1/1
	品號 PART NO.	5PH8DMA25-1XXXXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Erin 2015/08/19
	圖號 DRAWING NO.	GN016-GA441	版本 REV.	C	核對 CHECKED	John 2015/08/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/19	
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230807 Revise the drawing	Randy	2023/09/05
	ECR NO.:170503. Add annotations.	B	2017/06/16 Gary