

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 8 M S A 2 5 - 1 X X X X X X X U - A/B/C - 0 0

1:Single Row	No. of contacts Per Row(02~20)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg A:A Type (Odd & Even Pin) B:B Type (Only Even Pin)	 RoHS X:Box B:Bag T:Tube W/O Cap (5 Pin ↑) C:Tube With Cap (5 Pin ↑) H :Tape & Reel, W/O Cap R:Tape & Reel,With Cap	EX:040100040 A:4.0(040) B:10.0(100) C:4.0(040)
--------------	-----------------------------------	---	---	--	--	---


AMTEK 糧德
2023.10.04
Released DCC

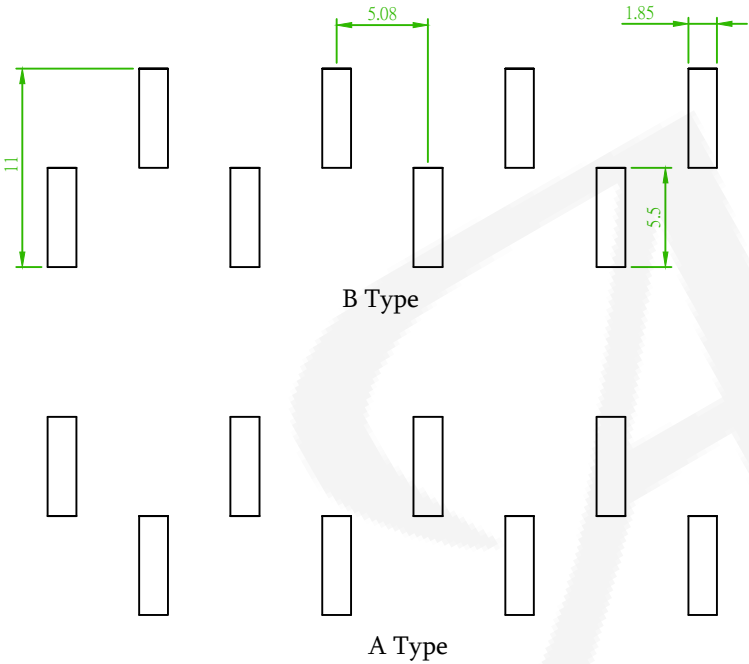

B Type



A Type

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

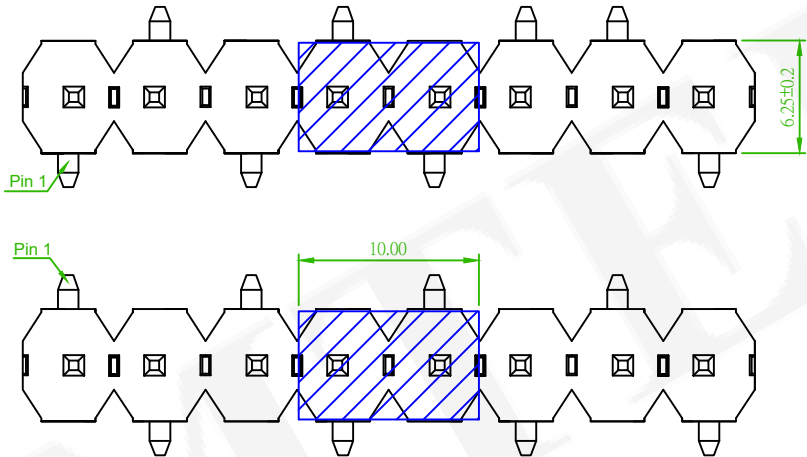

B Type

A Type

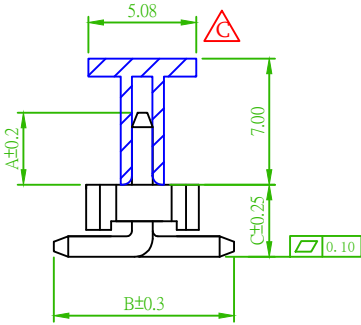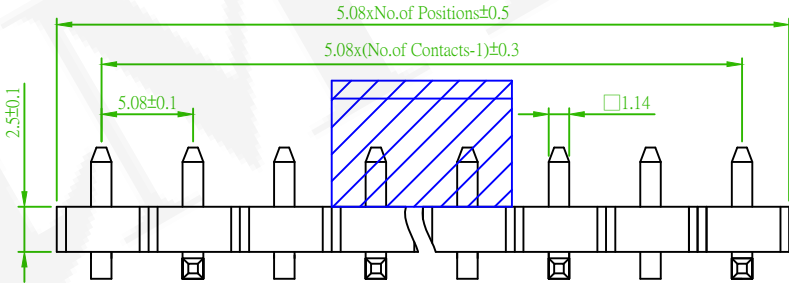

Old Part No. : PH8M25-1XX-U

	ECN NO.:230807 Revise the drawing	Randy	2023/09/05
	Add the Cap	Mia	2018/01/22
	ECN NO. : 170503. Add annotations.	Gary	2017/06/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 5.08mm S/R SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH8MSA25-1XXXXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Erin 2015/08/18
圖號 DRAWING NO.	GN016-GA442	版本 REV.	D	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		