

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 8 R D A 3 5 - 1 X X X X X X X U - A/B/C - 0 0

1:Single Row	No. of contacts per row(01~20)	G0:Gold Flash T0:Tin Plated	N:W/O Peg	B:Bag	RoHS	EX:103036075 A:10.3(103) B:3.6(036) C:7.5(075)
--------------	--------------------------------	--------------------------------	-----------	-------	------	---

AMTEK 耀德
2023.10.04
Released DCC

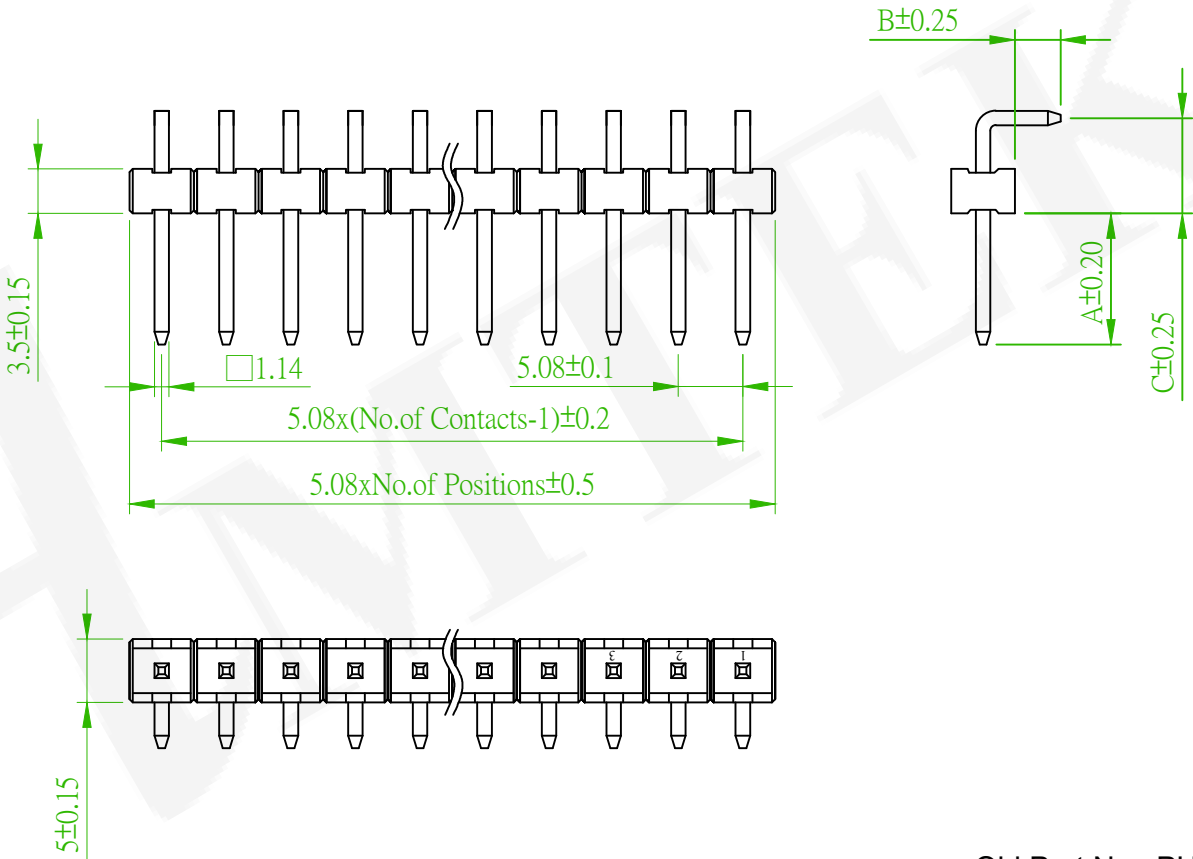

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH8R35-1XX-U

REV.	ECN NO.:230807 Revise the drawing	Randy	2023/09/05
	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 5.08mm S/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH8RDA35-1XXXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Roy 2018/10/09
	圖號 DRAWING NO.	GN003-RR873	版本 REV.	B	核對 CHECKED	Josh 2018/10/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/09	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	