


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 8 R U A 3 5 - 1 X X X X X X X U - A/B/C - 0 0

1:Single Row	No. of contacts per row(01-20)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	X-Box R:T/R with cap C:Tube with cap	B-Bag H:T/R W/O cap T:Tube W/O cap	RoHS	EX:036103075 A:3.6(036) B:10.3(103) C:7.5(075)
©T0:Tin Plated TE:Tin 200u"							

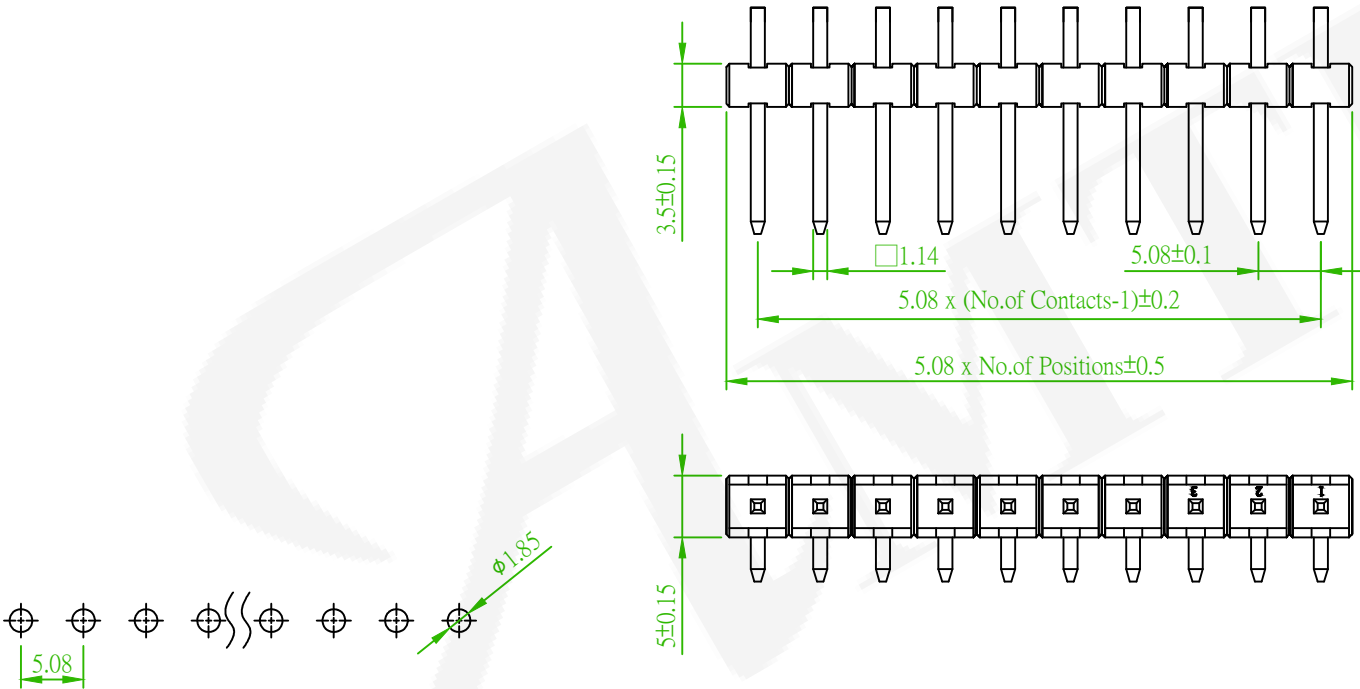

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH8RU35-1XX-U

REV.	ECN NO.:230807 Revise the drawing	Randy	2023/09/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 5.08mm				頁數 Page	1/1
	品號 PART NO.	5PH8RUA35-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/04/11
	圖號 DRAWING NO.	GN003-DV265	版本 REV.	B	核對 CHECKED	John 2016/04/11	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/11	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	