

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION



5 P H 8 R U B 2 5 - 1 X X X X X X X U - A/B/C - 0 0

1:Single Row	No. of contacts per row(02~20)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" ©T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	X:Box R:T/R with cap C:Tube with cap	B:Bag H:T/R W/O cap T:Tube W/O cap	RoHS	EX:082045051 A:8.2(082) B:4.5(045) C:5.08(051)
--------------	--------------------------------	--	---	--	--	------	---

AMTEK 糧德

2023.10.04

Released DCC

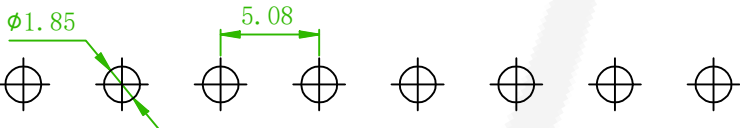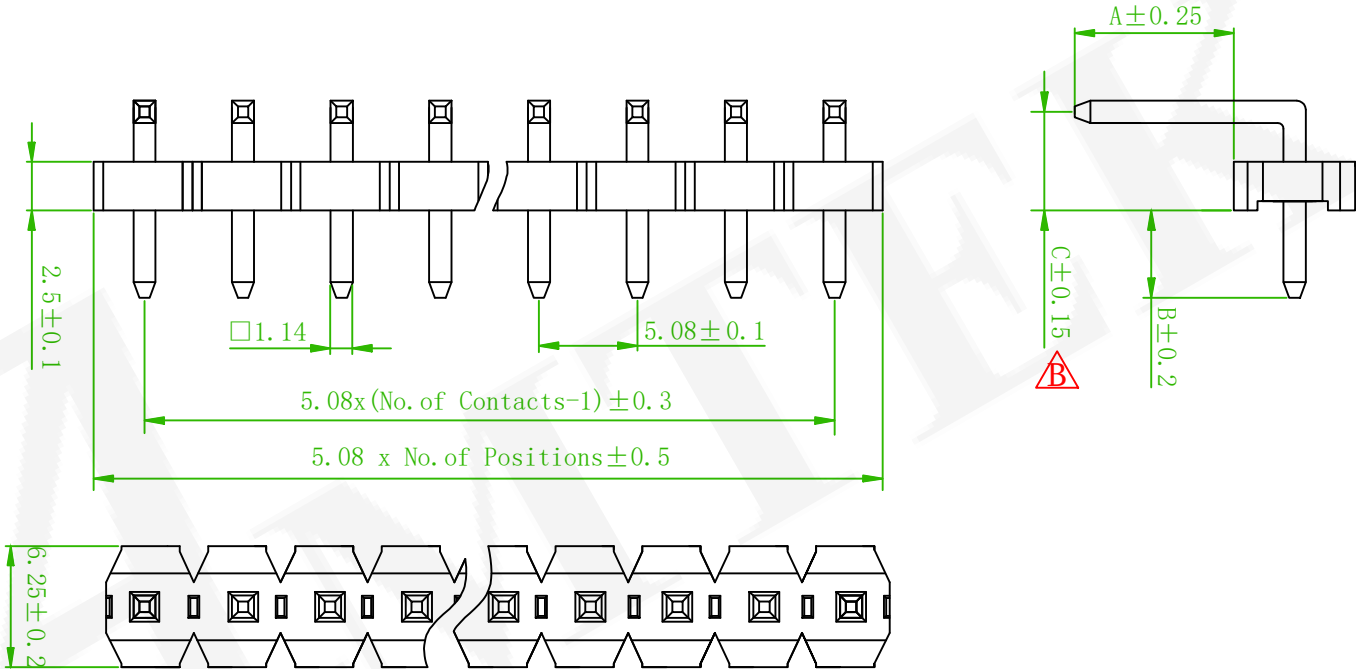

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH8RU25-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 5.08mm				頁數 Page	1/1
	品號 PART NO.	5PH8RUB25-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Roy 2016/04/15
	圖號 DRAWING NO.	GN110-JS012	版本 REV.	C	核對 CHECKED	Terri 2016/04/15	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/15	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230807 Revise the drawing	Randy	2023/09/05
	Revised the Drawing	B	2016/06/02 Mia