

ORDER INFORMATION

MATERIAL

Insulator: Nylon9T, UL94V-0, Black
Contact Pin: Brass

5 P H 9 D D A 3 2 - 1 X X X X X X X U - A L B - 0 0

1:Single Row

No. of contacts
Per Row(02~20)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:Non Type

RoHS

X:Box

B:Bag

T:Tube, W/O Cap

C:Tube, With Cap

H :Tape & Reel, W/O Cap

R:Tape & Reel,With Cap


EX:060040035
A:6.0(060)
L1:4.0(040)
B:3.5(035)



AMTEK 耀德
2023.09.27
Released DCC



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

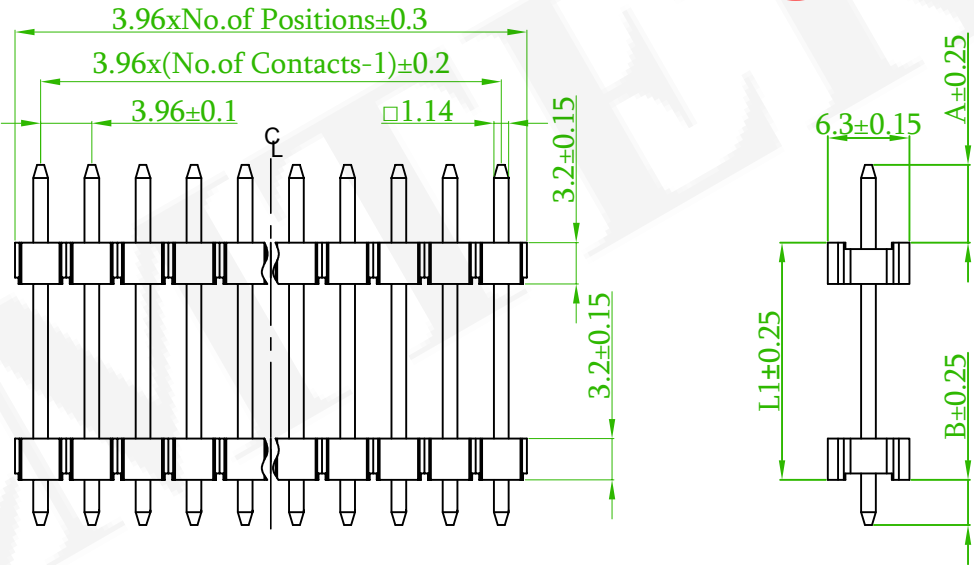

Old Part No. : PH396D32-1XX-U

△	ECN NO.:230809 Revise the drawing	Alice	2023/08/30
△x1	ECN No.:210619 Cancel the top view	Alice	2021/09/16
△x1	ECN NO.: 200708 Revise the No. of Contacts	Benson	2020/08/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 3.96mm				頁數 Page	1/1
品號 PART NO.	5PH9DDA32-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/04/11
圖號 DRAWING NO.	GN003-JS014	版本 REV.	D	核對 CHECKED	John 2016/04/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/11	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		