


MATERIAL

Insulator: Nylon9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 9 D M A 3 2 - 1 X X X X X X X U - A/L1/B - 0 0

2:Single Row	No. of contacts Per Row(01~20)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	A: A Type (Odd & Even Pin) B: B Type (Only Even Pin)	U: RoHS Hi-Temp.	EX:060067030 A: 6.0(060) L1: 6.65(067) B: 3.0(030)
				N: W/O Peg P: With Peg	X: Box R: T/R with cap C: Tube with cap (5 PIN ↑)	B: Bag H: T/R W/O cap T: Tube W/O cap (5 PIN ↑)

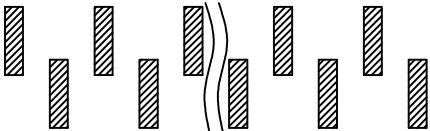


A TYPE

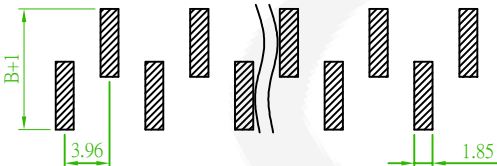


B TYPE



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

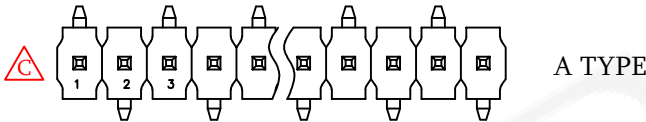

A TYPE

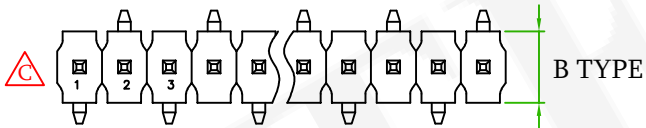

B TYPE

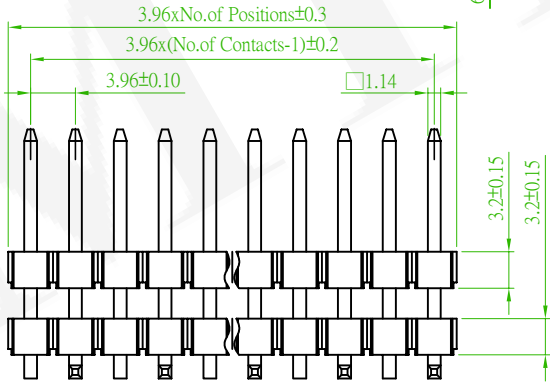

Old P/N : PH396DM32-1XX-U

△D	ECN NO.:230809 Revise the drawing	Alice	2023/08/30
△C	ECN No.:210619 Revise the top view	Alice	2021/09/22
△B	ECR NO.:170503. Add annotations.	B	2017/06/16 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 3.96mm				頁數 Page	1/1
品號 PART NO.	5PH9DMA32-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Sam 2009/07/31
圖號 DRAWING NO.	GN003-GA040	版本 REV.	D	核對 CHECKED	Paul 2009/07/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/07/31	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X°±5	單位 UNIT	mm	THIRD ANGLE PROJECTION	