

SPECIFICATION

Current Rating:3 AMP

Insulation Resistance: 1000MW Min.

Contact Resistance: 20mW Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp.Thermoplastic,UL 94V-0

Contant Pin: Copper Alloy

ORDER INFORMATION

5 P H 9 R U A 3 2 - 1 X X X X N N X U - A/B/C - 0 0

1:Single Row	No. of contacts Per Row(01~24)	G0:Gold Flash GA:Au 50" GB:Au 10u" GC2Au 20u" GD5Au 30u" TD:Tin Plated	S0:Selective Au SA:Selective Au 50" SB:Selective Au 10u" SC:Selective Au 20u" SD:Selective Au 30u" TE:Tin 200u"	N:Non Type	N:W/O Peg	X:Box R:RTR with cap C:Tube with cap	B:Bag H:RTR W/O cap T:Tube W/O cap	U:RoHS Hi-Temp.	EX:060067030 A:6.0(060) B:6.65(067) C:3.0(030)
--------------	-----------------------------------	---	--	------------	-----------	--	--	-----------------	---



Amtek
2017.05.19
文管中心




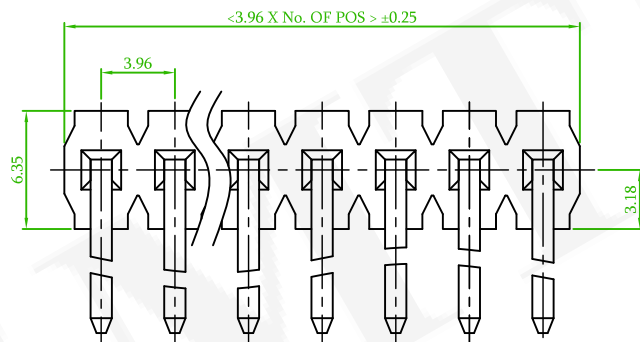


Table:

LEAD STYLE	DIMENSION		
	Dim.B	Dim.A	Dim.C
01	4.45	8.15	5.73
02	4.00	13.60	8.13
03	4.50	10.75	9.48
05	3.60	6.42	8.10

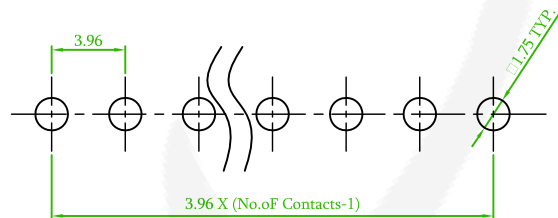

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

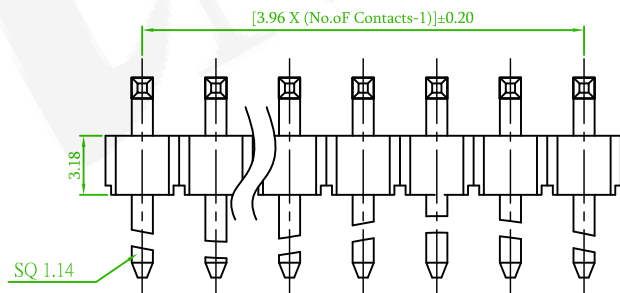

Old P/N :PH396R32-1XX-U

REV.	ECN NO.:170515 Revise the Order Information:5PH9RUA25-1XXXXNNXU-00->5PH9RUA32-1XXXXNNXU-00	B	2017/05/05 Mia
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 3.96mm 90° TYPE H=3.18mm				頁數 Page	1/1
	品號 PART NO.	5PH9RUA32-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Kent 2006/12/01
	圖號 DRAWING NO.	GW013-GA041		版本 REV.	B	核對 CHECKED	Paul 2006/12/01
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2006/12/01
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.X° ± 3					