

ORDER INFORMATION




MATERIAL

Insulator: Nylon9T, UL94V-0, Black


Contact Pin: Brass

5 P H 9 S D A 3 2 - 1 X X X X X X X U - A/B/000 - 0 0

1:Single Row	No. of contacts Per Row(02~20)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	N:Non Type	RoHS
						X:Box B:Bag T:Tube, W/O Cap C:Tube, With Cap H :Tape & Reel, W/O Cap R:Tape & Reel,With Cap

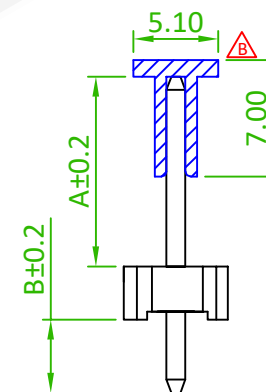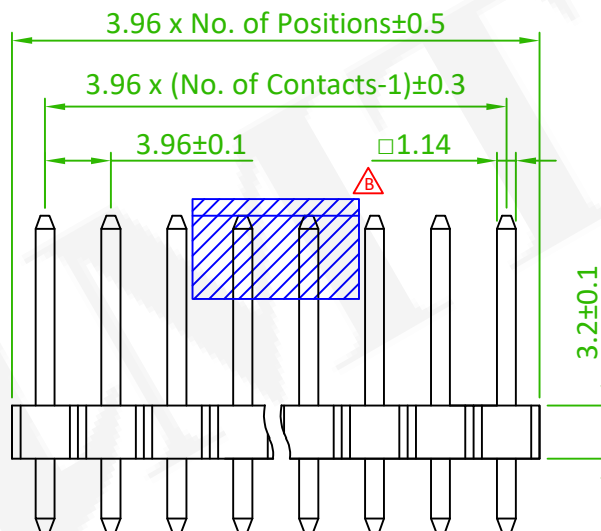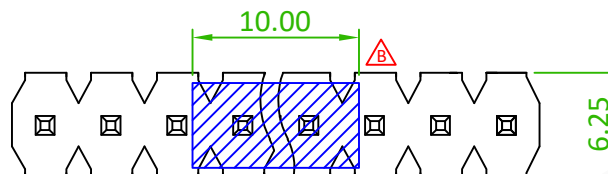

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



品名 TITLE	PIN HEADER 3.96mm				頁數 Page	1/1
品號 PART NO.	5PH9SDA32-1XXXXXXXU -XXXXXX000-00				繪圖 DRAWN	Roy 2016/03/01
圖號 DRAWING NO.	GN016-JS015	版本 REV.	C	核對 CHECKED	John 2016/03/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/03/01	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C	ECN NO.:230809 Revise the drawing	Alice	2023/08/31
△B x3	Add the Cap	David	2020/10/13