

Insulator: Nylon9T, UL94V-0, Black
Contact Pin: Brass ▲

ORDER INFORMATION

5 P H A M S A 2 5 - 2 X X X X X X X U - A/B/C - 0 0

2: Dual Row

No. of contacts Per Row

G0: Gold Flash	S0: Selective
GA: 5u"	SA: 5u"
GB: 10u"	SB: 10u"
GC: 20u"	SC: 20u"
GD: 30u"	SD: 30u"
T0: Tin Plated	
TE: Tin 200u"	



N: W/O Peg

N: Non Type



X: Box	B: Bag
R: T/R With Cap	H: T/R W/O Cap
C: Tube With Cap	T: Tube W/O Cap

RoHS

EX: 060110042
A: 6.0(060)
B: 11.0(110)
C: 4.2(042)

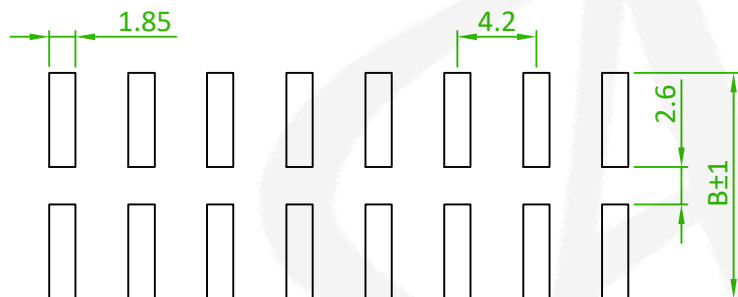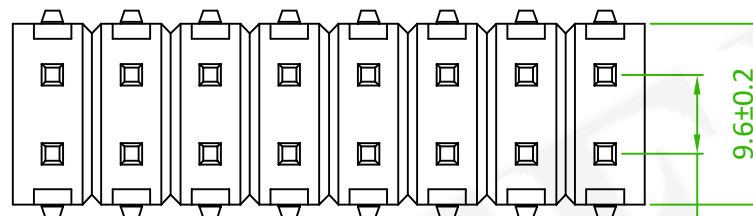

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

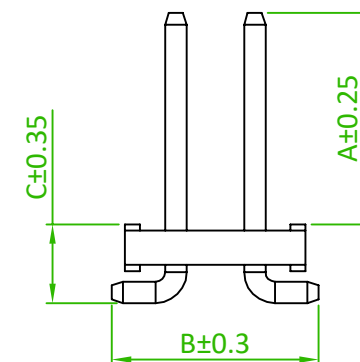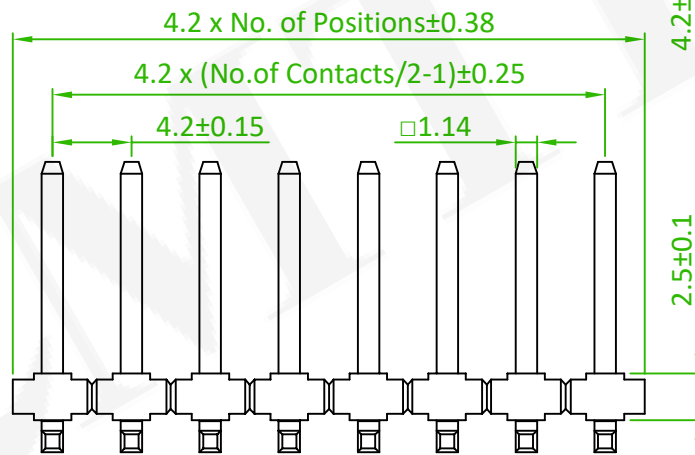

Old Part No. : PH42M25-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 4.2mm				頁數 Page	1/1
	品號 PART NO.	5PHAMSA25-2XXXXXXXU -XXXXXXXXXX-00			繪圖 DRAWN	Jeff 2016/09/19	
	圖號 DRAWING NO.	GN016-JS016	版本 REV.	B	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:230809 Revise the drawing	Alice	2023/09/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE