

MATERIAL E

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 1 B S A 3 5 - 2 X X X X X X X U - 0 0

©:Standard Recommend

2: Dual Row

No. of Pin
Per Row(02~40)

G0: Gold Flash

GA: 5u" SA: 5u"

GB: 10u" SB: 10u"

GC: 20u" SC: 20u"

GD: 30u" SD: 30u"

T0: Tin Plated

TE: Tin 200u"

N: W/O Peg

N: W/O Bump

T: Tube W/O Cap

C: Tube With Cap

H: T/R W/O Cap


R: T/R With Cap

N: Non Type

RoHS



AMTEK 糧德
2023.05.29
Released DCC

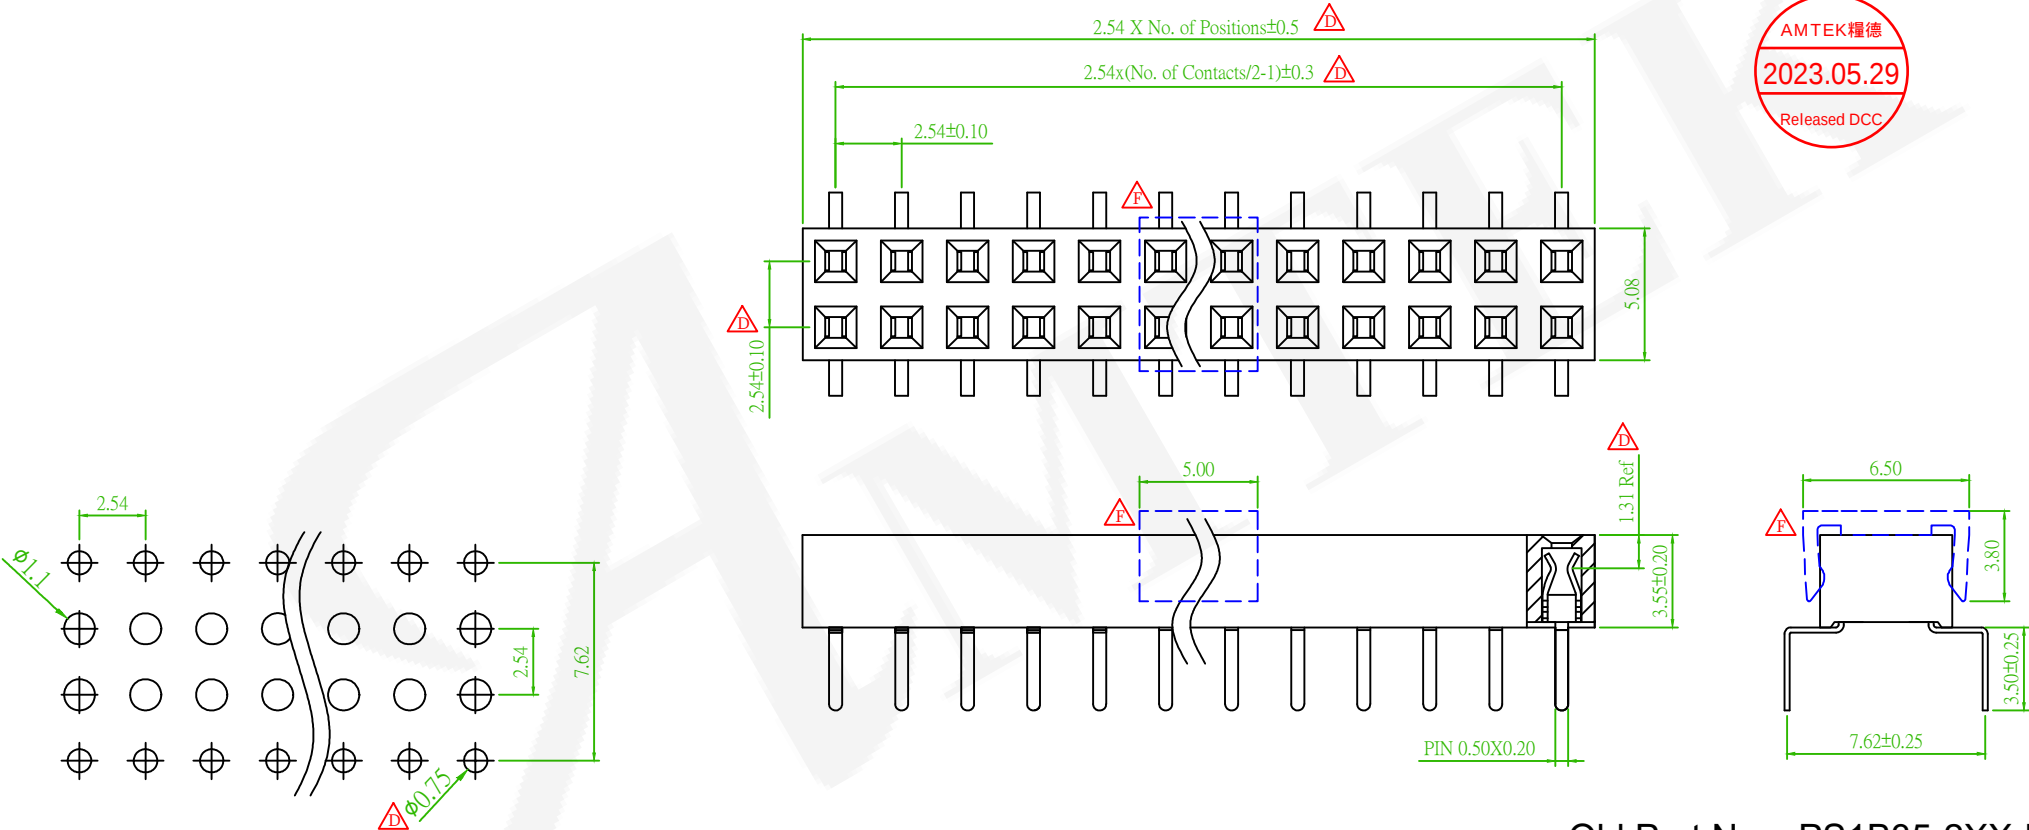

E Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS1B35-2XX-U

E x3	Add the Cap	Alice	2023/05/29
E x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/29
E x7	ECN 210122.: Revise the drawing	David	2020/02/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1BSA35-2XXXXXXXU-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN003-EA594	版本 REV.	F	核對 CHECKED	Josh 2019/01/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/21	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	E .X° ±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	