

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5

P

S

1

B

S

A

5

0

-

2

X

X

X

X

N

N

A

X

U

-

0

0

2:Dual Row

No. of Pin Per Row(02~40)

GA:5u"

GB:10u"

GC:20u"

GD:30u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump

R:T/R with cap

C:Tube with cap

H:T/R W/O cap





T:Tube W/O cap

A:A Type

RoHS

T0:Tin Plated

TE:Tin 200u"

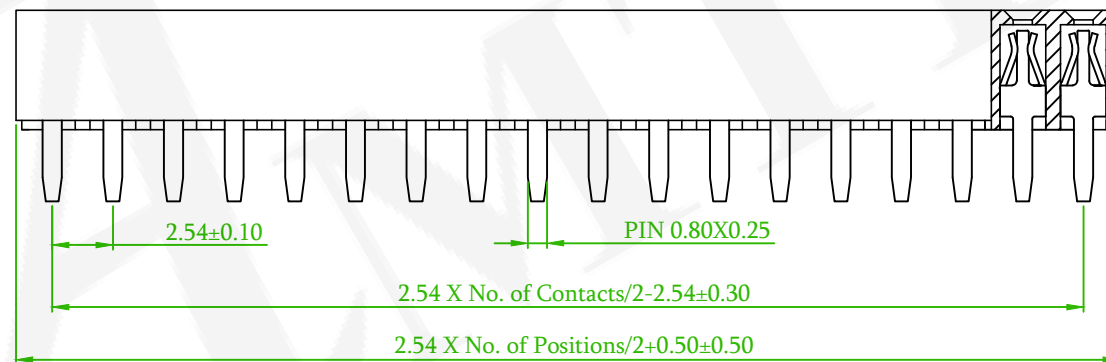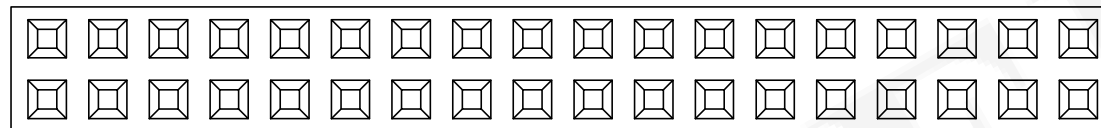

A Type

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No. :PS1B50-2XX-A-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1BSA50-2XXXXNNAXU-00				繪圖 DRAWN	Mia 2015/08/27
	圖號 DRAWING NO.	GN003-EA628	版本 REV.	C	核對 CHECKED	Josh 2019/01/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/24	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/29
 x1	Add the Recommended Mating Part	Eric	2019/01/24