

MATERIAL DInsulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze**ORDER INFORMATION**

5 P S 1 B S A 5 0 - 2 X X X X N N C X U - 0 0

2: Dual Row

No. of Pin
Per Row (02~40)

◎G0: Gold Flash	S0: Selective
GA: 5u"	SA: 5u"
GB: 10u"	SB: 10u"
GC: 20u"	SC: 20u"
GD: 30u"	SD: 30u"
T0: Tin Plated	
TE: Tin 200u"	

N: W/O Peg

N: W/O Bump

R: T/R with cap

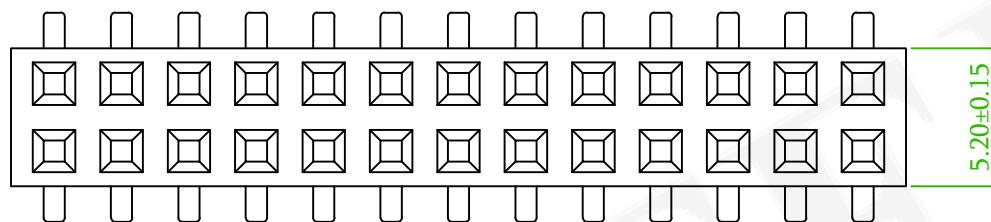
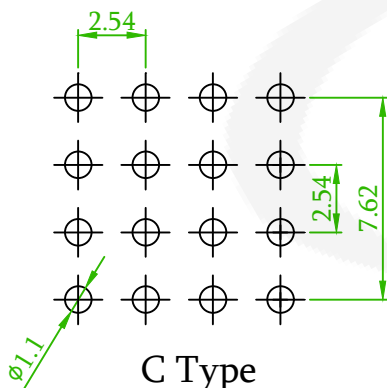

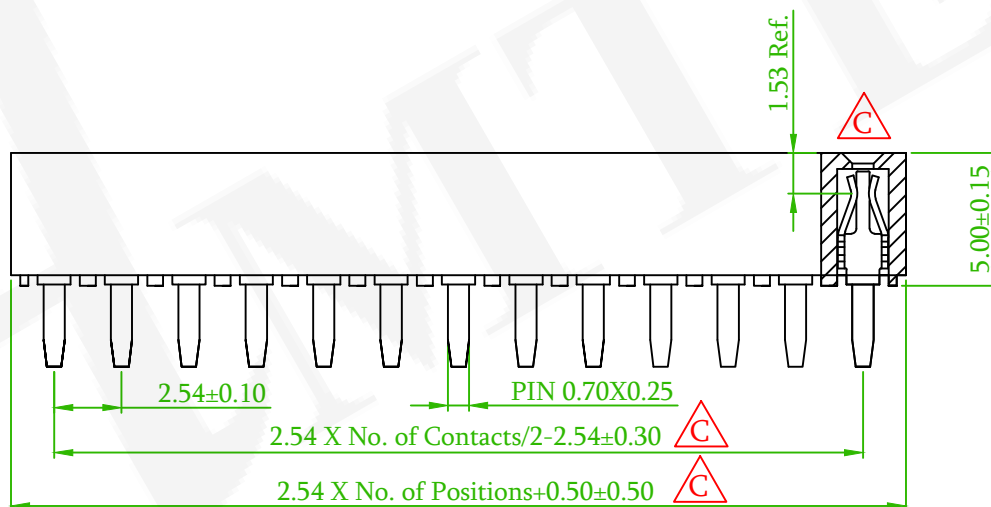
C: Tube with cap

H: T/R W/O cap

T: Tube W/O cap

C: C Type

RoHS

B C**C Type**Recommended PCB Layout
(PCB TOLERANCE ±0.05)C

Old Part No.: PS1B50-2XX-C-U

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1BSA50-2XXXXNNCXU-00				繪圖 DRAWN	Mia 2015/08/27
	圖號 DRAWING NO.	GN003-EA633		版本 REV.	D	核對 CHECKED	Josh 2019/01/25
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2019/01/25
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

D x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/29
C x5	ECN.NO.201220:Revise the drawing	Alice	2020/12/24
B x1	Add the Recommended Mating Part	Eric	2019/01/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE