

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P S 1 E A A 8 5 - 1 X X X X 5 X U XXXXXX - 0 0

1:Single Row

No. of Pin
Per Row(02~40)

G0:Gold Flash

GA:5u"
GB:10u"
GC:20u"
GD:30u"

S0:Selective

SA:5u"
SB:10u"
SC:20u"
SD:30u"

T:Tube

X:Box

RoHS

See Table




AMTEK 耀德
2023.04.10
Released DCC

	Add Number	Dimensions(mm)	
		A	B
110023	1	11.04	2.30
110074			7.35
110122			12.20
135049	2	13.58	4.85
135097			9.65
160023	3	16.12	2.30
160071			7.10
185046	4	18.66	4.60



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

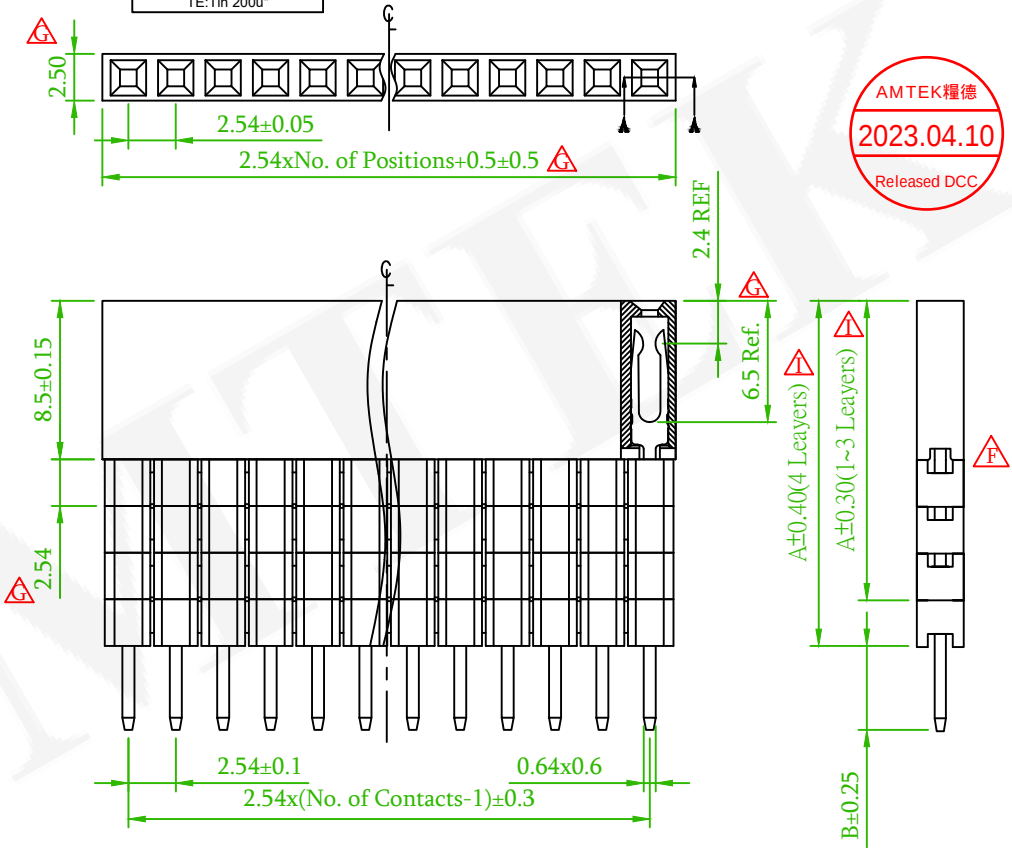

SECTION A-A

Old Part No. : PS1E-1XX-U

x1	ECN NO.:230315 Revise the Options	Rex	2023/03/28
x3	ECN NO.:221108 Revise the drawing	Benson	2022/12/20
x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PS1EAA85-1XXXX5XUXXXXXX-00				繪圖 DRAWN	Roy 2016/05/12
	圖號 DRAWING NO.	GN003-RL345	版本 REV.	J	核對 CHECKED	Josh 2019/05/13	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/05/13	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	