

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 E A A 8 5 - 2 X X X X 5 X U XXXXXX - 0 0

2: Dual Row

No. of Pin
Per Row(02~40)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GF:15u"	SF:15u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	


T:Tube W/O Cap

RoHS




See Table



Table			
	Number	Dim. A	Dim. B
110023	1	11.04	2.30
111031			3.10
110074			7.35
110122			12.2
135049	2	13.58	4.85
160023	3	16.12	2.30
160028			2.80
160071			7.10
185046	4	18.66	4.60
210021	5	21.20	2.10

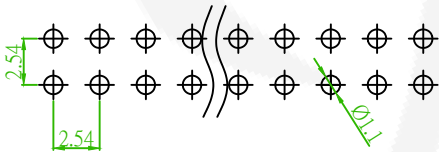

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

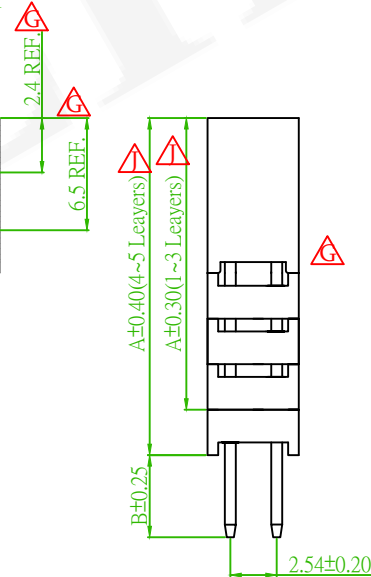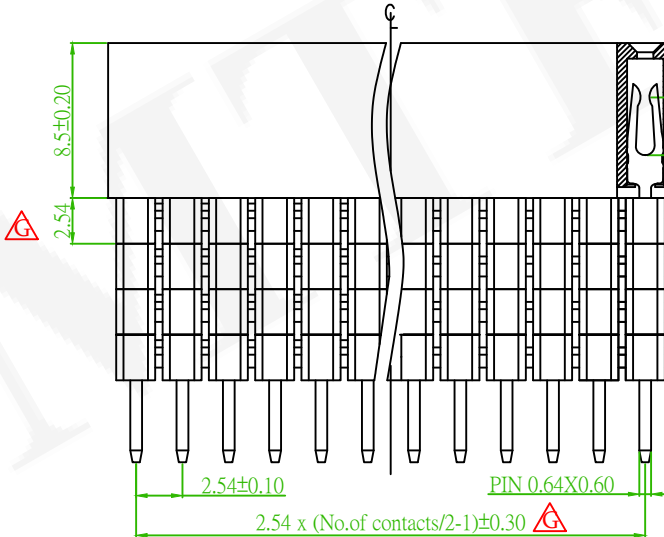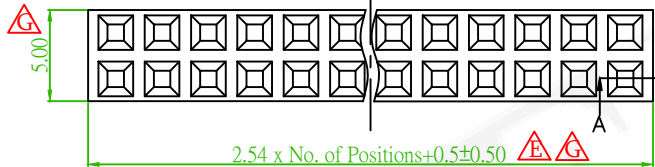

AMTEK 耀德
2023.04.10
Released DCC

Old Part No. : PS1E-2XX-U

△x1	ECN NO.:230315 Revise the Options	Rex	2023/03/28
△x3	ECN NO.:221108 Revise the drawing	Benson	2022/12/20
△x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1EAA85-2XXXXX5XU XXXXXX-00				繪圖 DRAWN	Mia 2016/06/24
圖號 DRAWING NO.	GN003-RL346	版本 REV.	K	核對 CHECKED	John 2016/06/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/24	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		