

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass



ORDER INFORMATION

5 P S 1 E A A 8 5 - 3 X X X X 5 X U XXXXXX - 0 0


3:Triple Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T:Tube W/O Cap A:Tray W/O Cap	RoHS	See Table
		T0:Tin Plated TE:Tin 200u"				




TABLE			
	Add Number	Dim. A	Dim. B
110023	1	11.00	2.30
110074			7.35
110122			12.2
135049	2	13.50	4.85
135097			9.65
160023	3	16.00	2.30
160071			7.10
185046	4	18.50	4.60

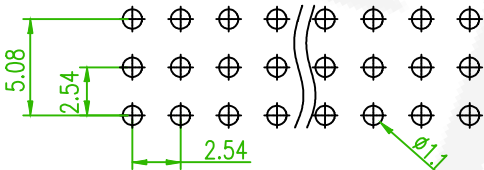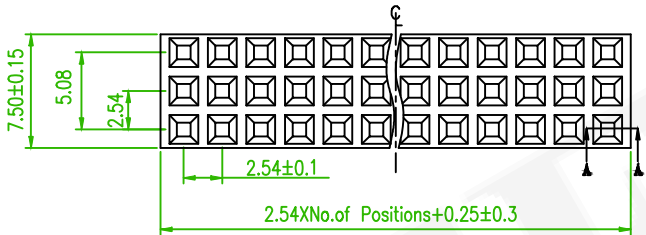

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

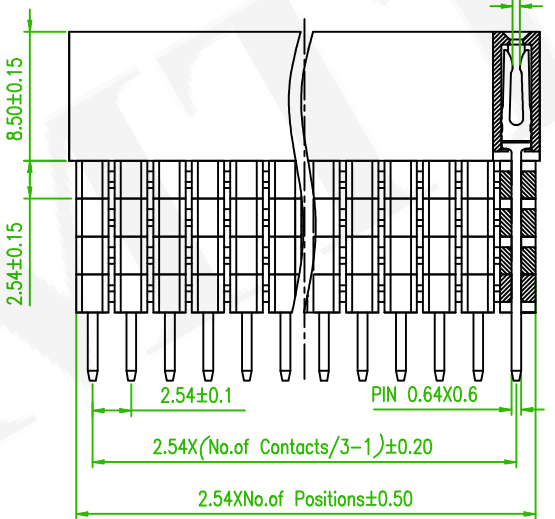

SECTION A-A

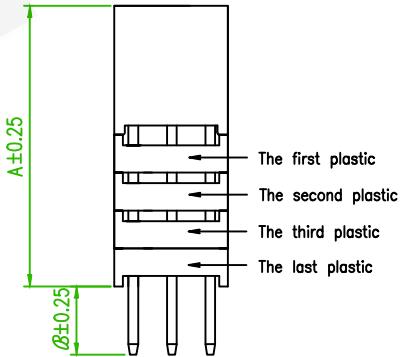

Old Part No. : PS1E-3XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1EAA85-3XXXXX5XU XXXXXX-00				繪圖 DRAWN	Mia 2017/12/04
	圖號 DRAWING NO.	GN003-MC794	版本 REV.	B	核對 CHECKED	Jason 2017/12/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/12/04	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:220102 Revise the drawing	Alice	2022/03/30