

MATERIAL

Insulator:PBT, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 F E A 8 5 - 1 X X X X 5 T L XXXXXX - 0 0

1:Single Row



No. of Pin
Per Row(02~40)

GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	




T:Tube

L:RoHS+PBT

See Table

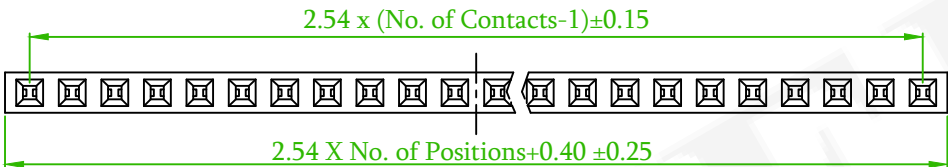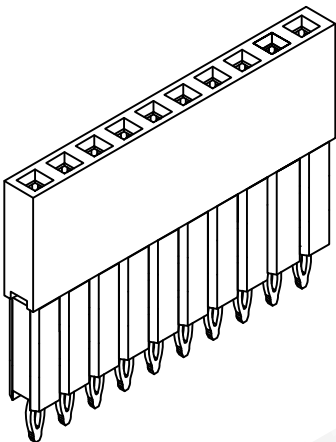

Part No.	Dim A	Dim B
5PS1FEA85-1XXXX5TLXXXX-00		
5PS1FEA85-1XXXX5TL111032-00	11.05	3.2
5PS1FEA85-1XXXX5TL136032-00	13.59	3.2
5PS1FEA85-1XXXX5TL161032-00	16.13	3.2
5PS1FEA85-1XXXX5TL187032-00	18.67	3.2
5PS1FEA85-1XXXX5TL111122-00	11.05	12.2

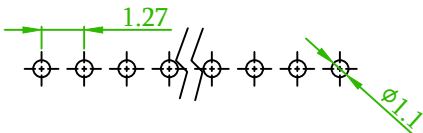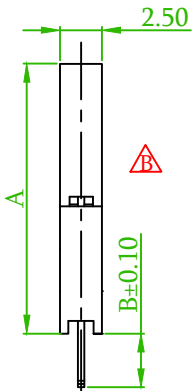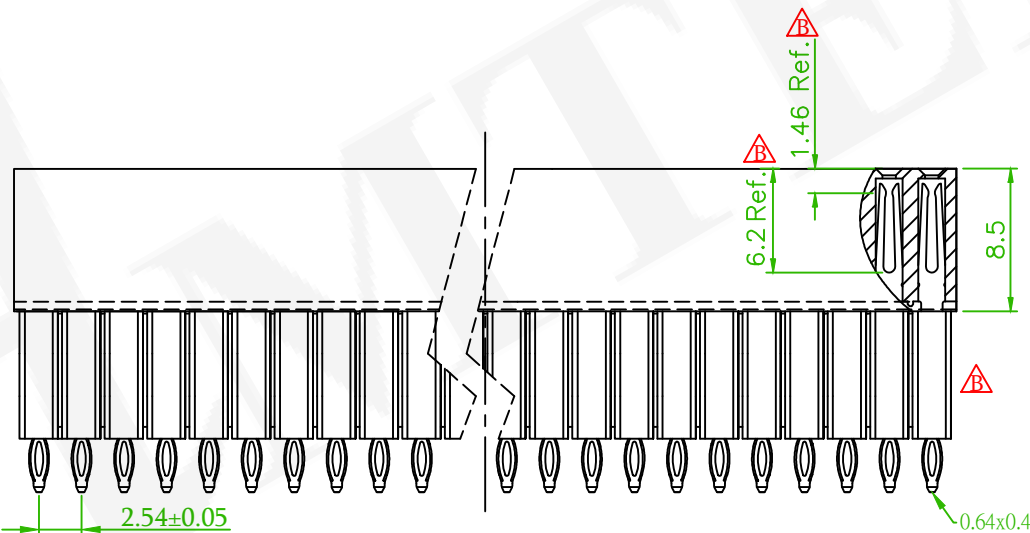

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS1FE-1XX-L



REV.

ECN NO.:220102 Revise the drawing

ECN NO.: 200906 Revise the Drawing

ECN NO. OR DESCRIPTION

Alice

2022/03/30

Benson

2020/09/25

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

品號
PART NO.

圖號
DRAWING NO.

客戶品號
CUSTOMER P/N

公差
TOLERANCE

FEMALE HEADER ELEVATED 2.54mm

5PS1FEA85-1XXXX5TLXXXX-00

GW011-BN349

.X ± 0.38
XX ± 0.25

繪圖
DRAWN

核對
CHECKED

承認
APPROVED

THIRD
ANGLE
PROJECTION

頁數
Page

1/1

Roy
2016/09/12

Jonny
2016/09/12

Aaron
2016/09/12