

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 1 K S A 5 0 - 2 X X X X B N N X U - 0 0




2: Dual Row	No. of Pin Per Row(02~40)	③G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0: Tin Plated TE: Tin 200u"	S0: Selective SA:5u" SB:10u" SC:20u" SD:30u"	N: W/O Peg B: With Bump	R: T/R with cap C: Tube with cap N: N Type	H: T/R W/O cap T: Tube W/O cap	RoHS
-------------	---------------------------	--	--	----------------------------	--	-----------------------------------	------



AMTEK 糧德

2022.06.28

Released DCC

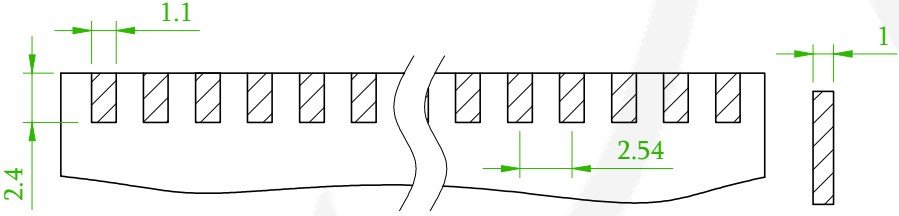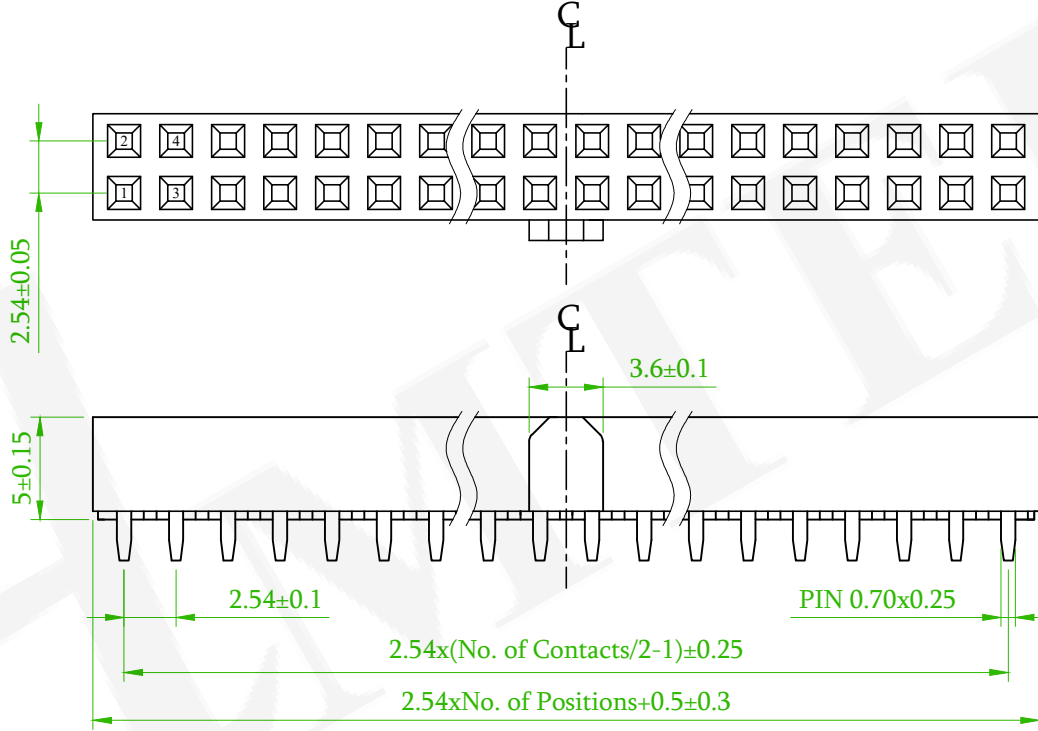

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PS1K50B-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm					頁數 Page	1/1
	品號 PART NO.	5PS1KSA50-2XXXXBNNXU-00				繪圖 DRAWN	Mia 2015/08/28	
	圖號 DRAWING NO.	GN003-GB790		版本 REV.	C	核對 CHECKED	Josh 2019/01/14	
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2019/01/14	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	ECN NO.:220102 Revise the drawing	Alice	2022/06/13
 x1	Add the Recommended Mating Part.	Gary	2019/01/14