

MATERIAL Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass**ORDER INFORMATION**

5 P S 1 K S A 5 7 - 2 X X X X N N N X U - 0 0

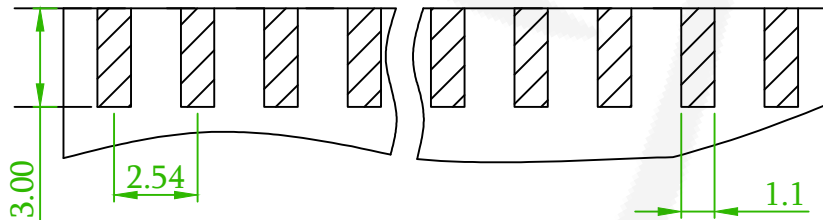
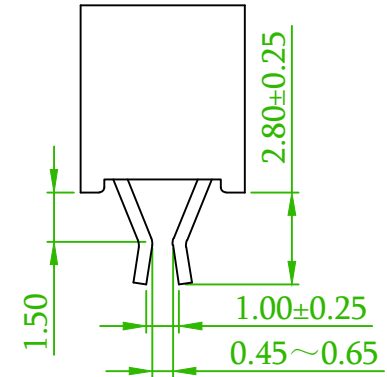
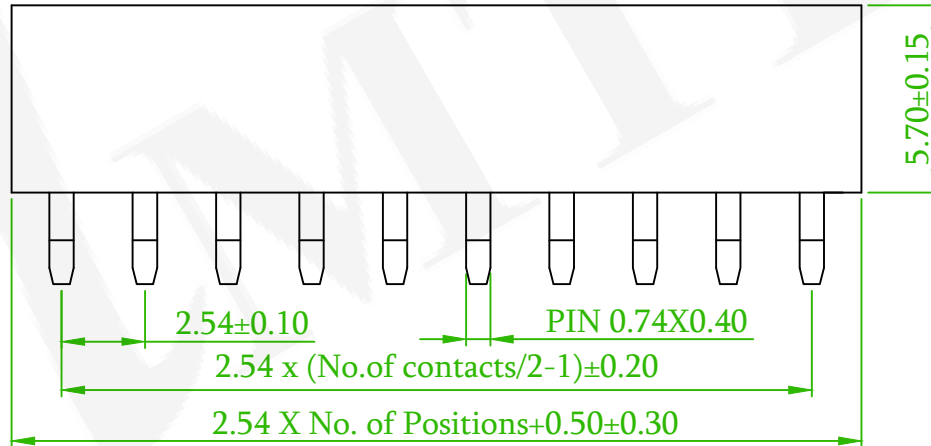
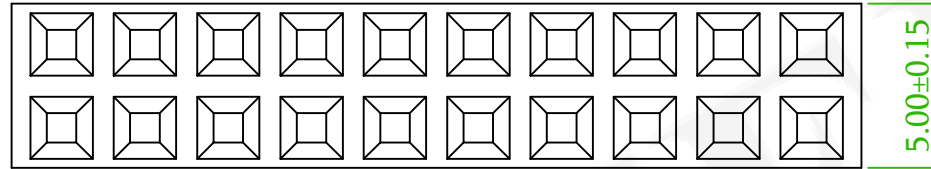
2: Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	R:T/R with cap C:Tube with cap N:N Type	H:T/R W/O cap T:Tube W/O cap	RoHS
-------------	------------------------------	--	---	-------------------------	---	---------------------------------	------



AMTEK 糧德

2022.06.28

Released DCC

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PS1K57-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1KSA57-2XXXXNNNXU-00				繪圖 DRAWN	Mia 2015/09/01
	圖號 DRAWING NO.	GN003-AB395	版本 REV.	B	核對 CHECKED	John 2015/09/01	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/01	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	



ECN NO.:220102 Revise the drawing

Alice

2022/06/15

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE