

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 M R A 8 5 - 2 X X X X N N N X U - 0 0

2: Dual Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash S0:Selective
GA:5u" SA:5u"
GB:10u" SB:10u"
GC:20u" SC:20u"
GD:30u" SD:30u"
T0:Tin Plated
TE:Tin 200u"

N:W/O Peg

N:W/O Bump




◎T:Tube, W/O Cap
H:Tape & Reel, W/O Cap

RoHS


N:Non Type



AMTEK 耀德
2022.06.27
Released DCC

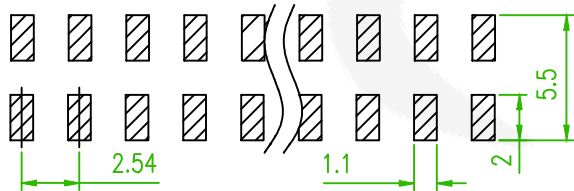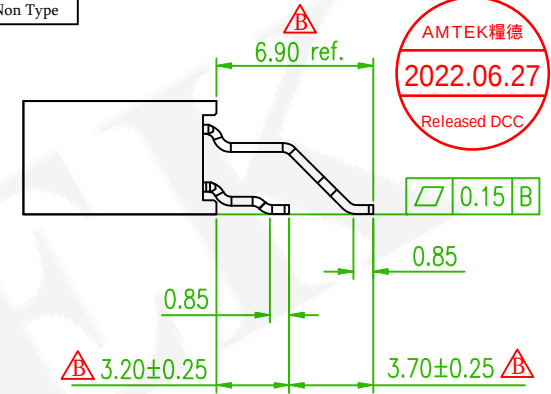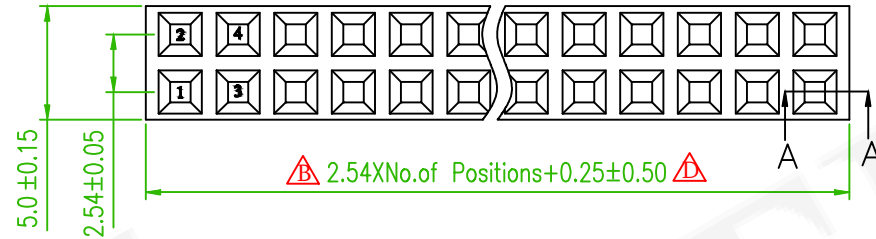

 Recommended PCB Layout
(PCB TOLERANCE ±0.05)

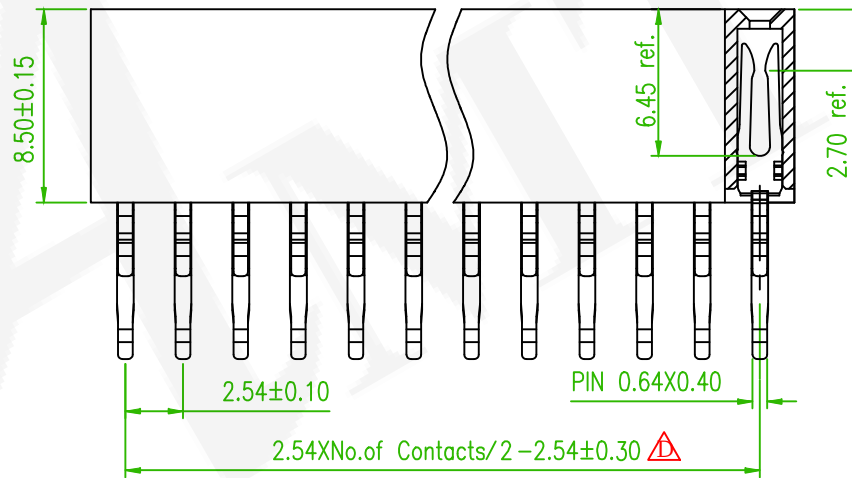

SECTION A-A

Old Part No. : PS1MR85-2XX-U

 x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/31
	ECN No.: 210423 Revise the drawing	Alice	2021/05/07
	Revise the package	Benson	2019/07/22
REV.	DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1MRA85-2XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-RL794	版本 REV.	E	核對 CHECKED	John 2015/08/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	