

ORDER INFORMATION



SPECIFICATIONS

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40 °C to +105 °C


MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy



5 P S 1 M S A 8 5 - 2 X X X X N N N X U - 0 0

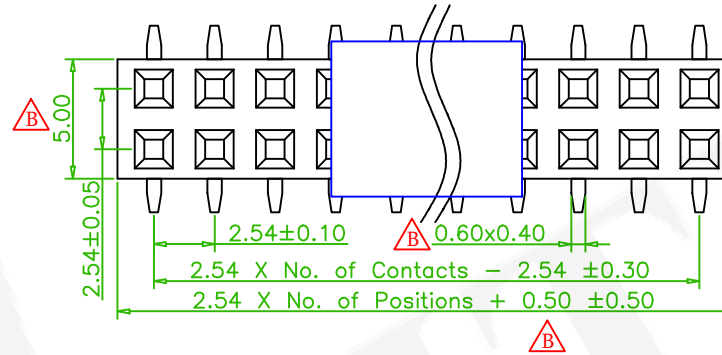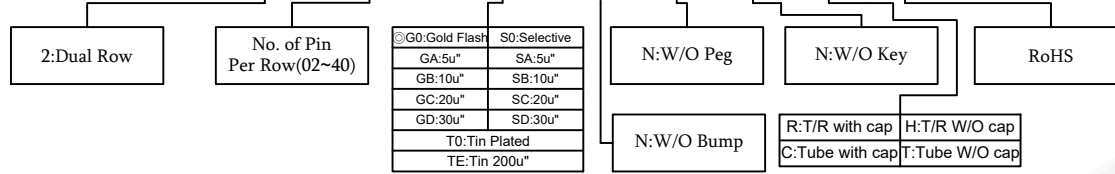

Dim. L	NOTE
5.00mm	02~04Pin
8.00mm	05~40Pin

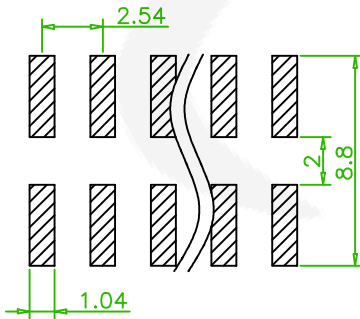

△ Recommended PCB Layout (PCB TOLERANCE ±0.05)

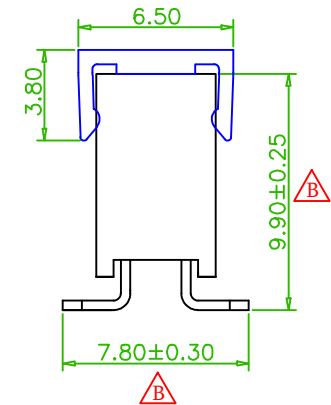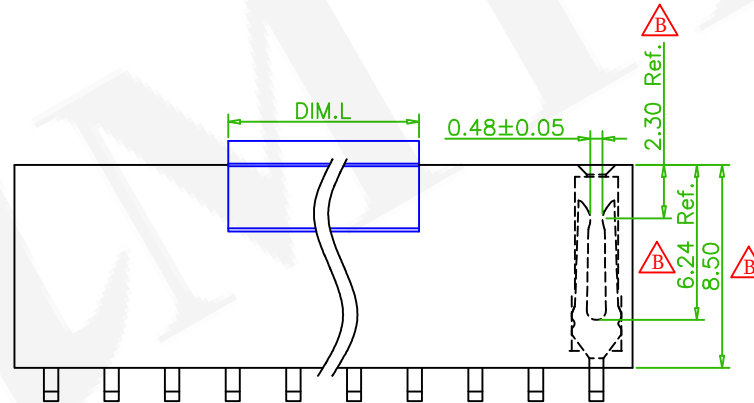

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm PLASTIC HEIGHT			頁數 Page	1/1
品號 PART NO.	5PS1MSA85-2XXXXNXXU-00		繪圖 DRAWN	Andy 2017/09/14	
圖號 DRAWING NO.	GN003-AA056	版本 REV.	B	核對 CHECKED	Carol 2017/09/14
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/09/14
公差 TOLERANCE	△.X ± 0.38 △.XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO.: 210612 Revise the drawing	Alice	2021/6/30
	ECN NO. OR DESCRIPTION	REVISED	DATE