

MATERIAL ⚠

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass



ORDER INFORMATION

5 P S 1 R D A 5 7 - 2 X X X X N N N X U - 0 0

2: Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0: Tin Plated TE: Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap	RoHS
					N:Non Type	



AMTEK 耀德
2022.06.27
Released DCC

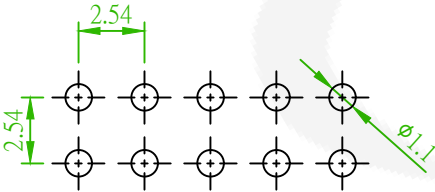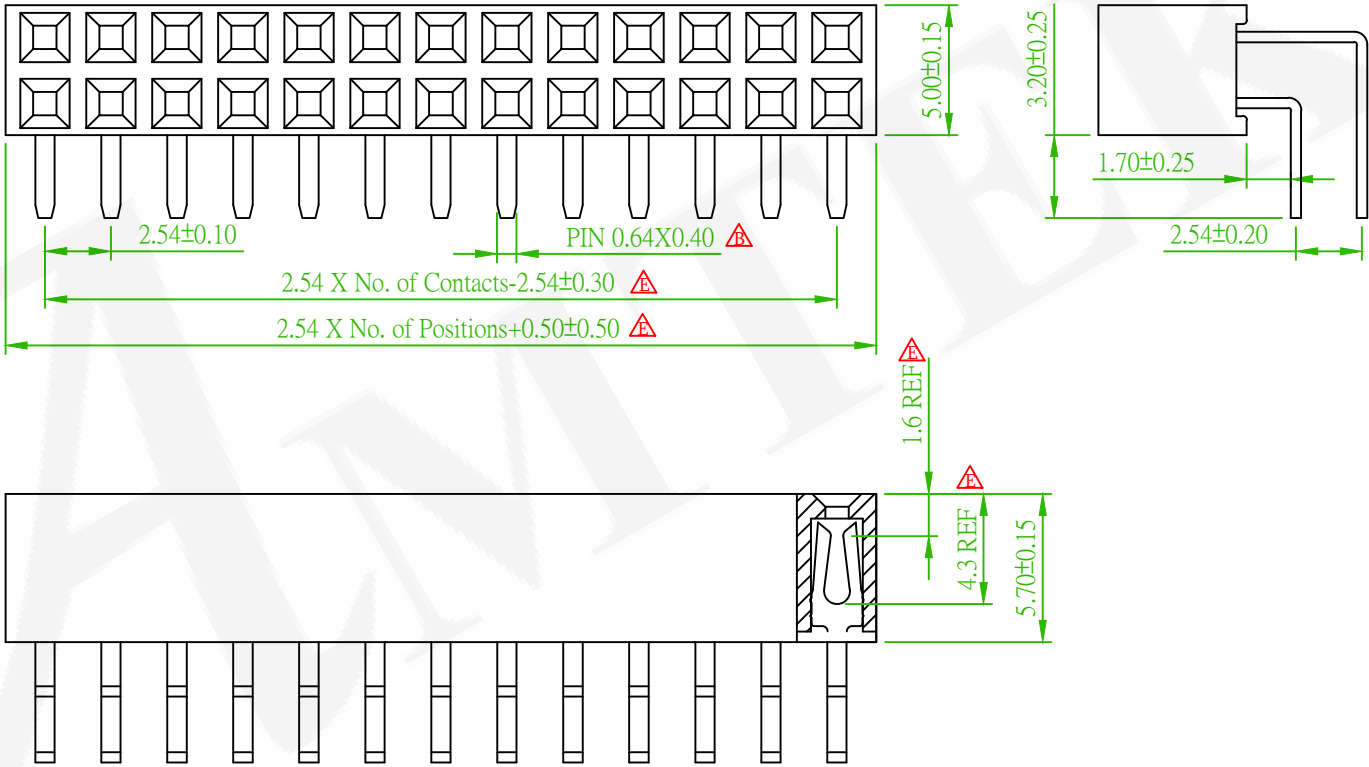

Recommended PCB Layout
(PCB TOLERANCE ±0.05) ⚠

Old Part No. : PS1R57-2XX-U

REV.	DESCRIPTION	REVISED	DATE
⚠x1	ECN NO.:220102 Revise the drawing	Alice	2022/05/03
⚠x6	ECN NO:210529 Revise the drawing	David	2021/06/03
⚠	ECN NO:210208 Revise the packing	Alice	2021/03/17



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1RDA57-2XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/28
圖號 DRAWING NO.	GN003-BS691	版本 REV.	F	核對 CHECKED	John 2015/08/28	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/28	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	