




MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 S D A 8 5 - 1 X X X X N N N X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap A:Tray, W/O Cap P:Tray, With Cap N:Non Type	RoHS
--------------	------------------------------	--	---	-------------------------	--	------

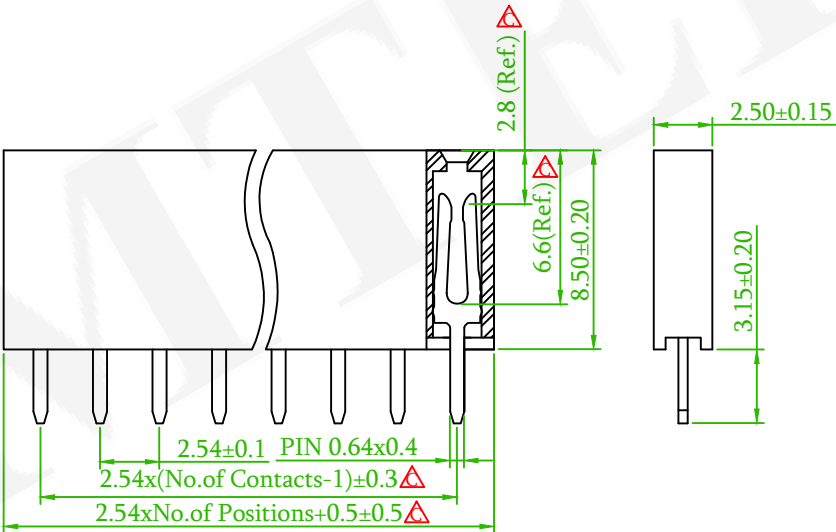

Recommended PCB Layout
(PCB TOLERANCE ±0.05) 

Old Part No. : PS1S85-1XX-U

 x1	ECN NO.:220102 Revise the drawing	Alice	2022/05/05
 x6	ECN NO.:210120 Revise the Drawing	Benson	2021/03/18
 x1	Add the Package:Tray	Mia	2018/01/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm V/T S/R DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PS1SDA85-1XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/27
	圖號 DRAWING NO.	GN003-MC867	版本 REV.	D	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	