

MATERIAL △_E

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Phosphor Bronze

ORDER INFORMATION

5 P S 1 S D B 5 0 - 2 X X X X N N N T U - 0 0

2: Dual Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash

GA:5u"
GB:10u"
GC:20u"
GD:30u"

S0:Selective

SA:5u"
SB:10u"
SC:20u"
SD:30u"


N:W/O Peg

N:W/O Bump


◎T:Tube, W/O Cap

N:Non Type

RoHS

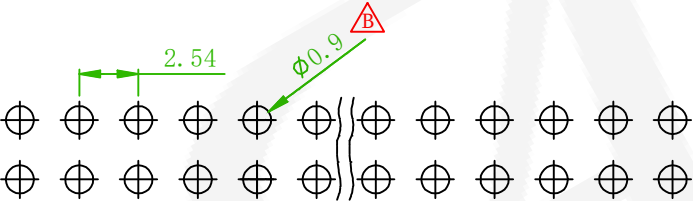

△ Recommended PCB Layout
(PCB TOLERANCE ±0.05)

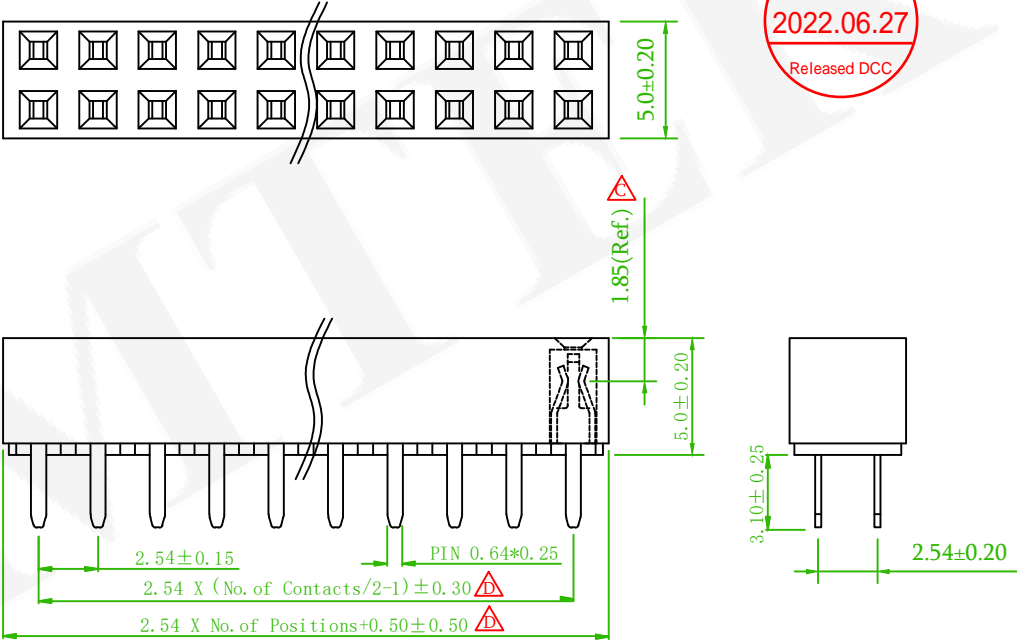

AMTEK 耀德
2022.06.27
Released DCC

Old Part No. : PS1S50-2XX-U

△ _{x1}	ECN NO.:220102 Revise the drawing	Alice	2022/05/05
△ _{x3}	ECN.NO.210522:Revise the drawing	Alice	2021/06/03
△ _{x1}	ECN.NO.200404 :Add Contact Point DIM.	David	2020/05/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.		5PS1SDB50-2XXXXNNNTU-00				繪圖 DRAWN	Roy 2016/12/15
圖號 DRAWING NO.		GN104-RL237	版本 REV.	E	核對 CHECKED	Jonny 2016/12/15	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/12/15	
公差 TOLERANCE		.X ± 0.38 .XX ± 0.25	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	