



MATERIAL △B

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Phosphor Bronze

ORDER INFORMATION

5 P S 1 S D B 6 8 - 1 X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	T:Tube N:N Type	RoHS
--------------	------------------------------	---	---	-------------------------	--------------------	------

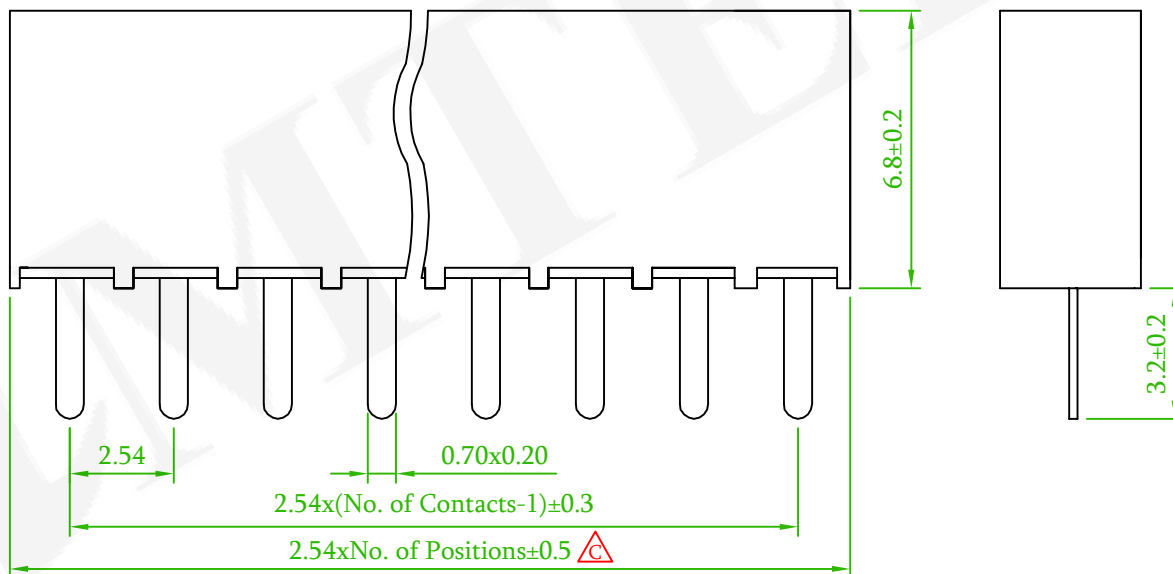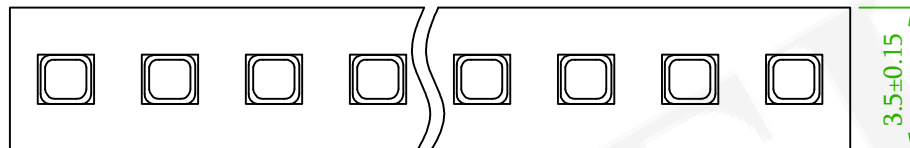

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old P/N: PS1S68-1XX

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PS1SDB68-1XXXXXXXXXU-00				繪圖 DRAWN	Gary 2019/01/25
	圖號 DRAWING NO.	GN110-EA600	版本 REV.	C	核對 CHECKED	Josh 2019/01/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/25	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x1	ECN NO.:230412 Revise the drawing	Benson	2023/05/15
△x1	ECN NO.:220102 Revise the drawing	Alice	2022/05/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE