

MATERIAL

Insulator:PBT , UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 S D D 8 5 - 2 X X X X X X X L - 0 0

2:Dual Row

No. of Pin
Per Row(02~40)

ⓄG0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump

T:Tube, W/O Cap

C:Tube, With Cap

H:Tape & Reel, W/O Cap



R:Tape & Reel, With Cap

ⓄA:Tray, W/O Cap

N:Non Type

RoHS

AMTEK 耀德
2023.11.30
Released DCC

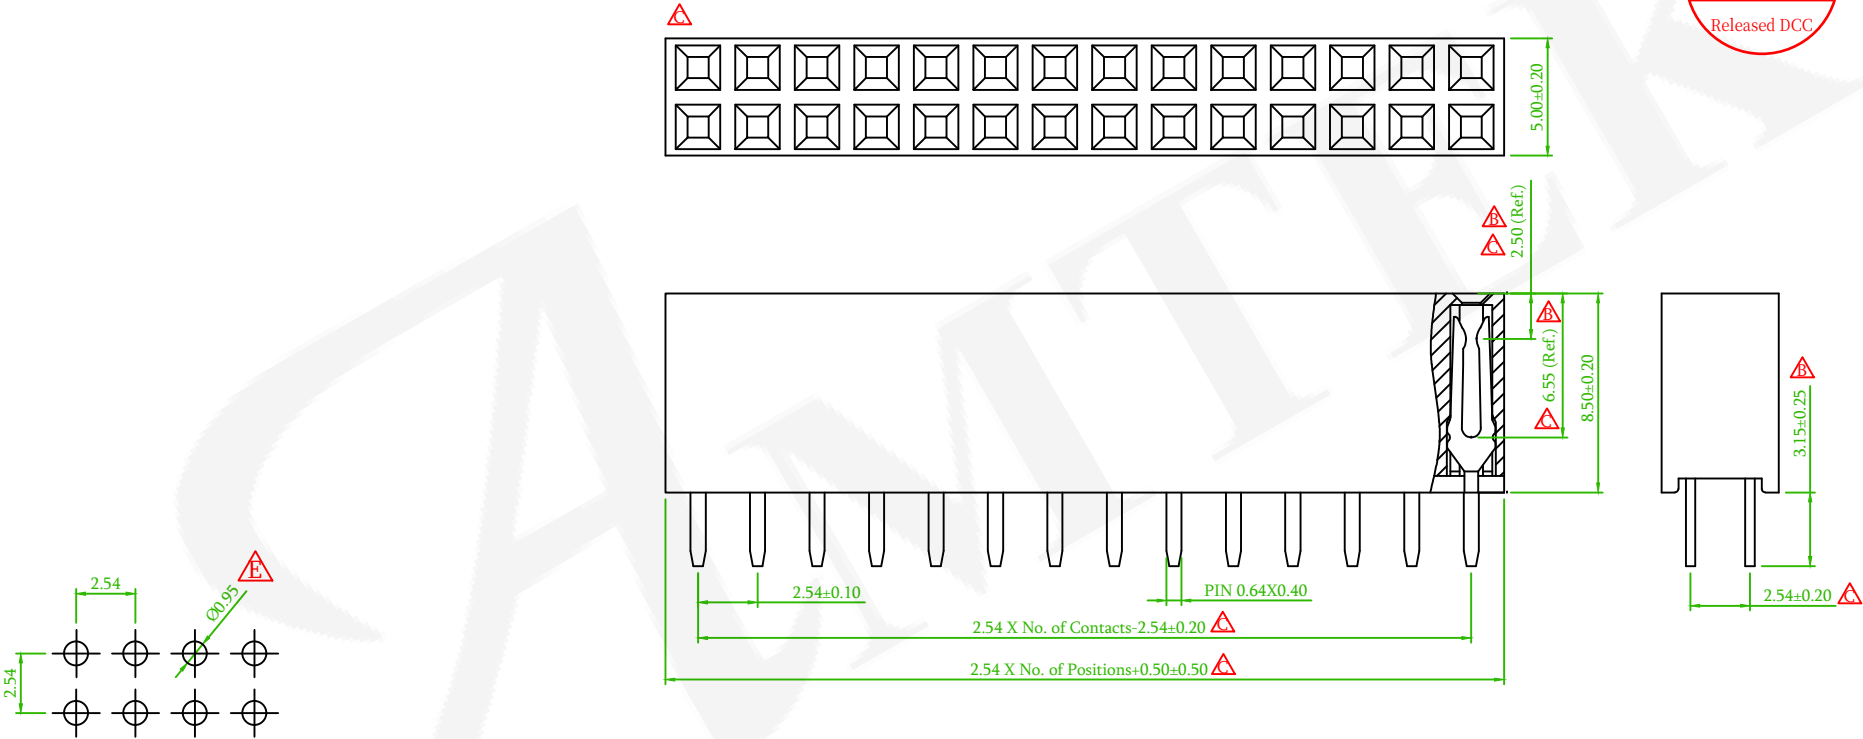

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS1S85-2XX-L

	ECN NO.:231104 Revise the drawing	Alice	2023/11/24
	EasyFlow:2023100502	Alice	2023/10/05
	ECN NO.:220102 Revise the drawing	Alice	2022/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1SDD85-2XXXXXXXXXL-00				繪圖 DRAWN	Roy 2016/09/29
圖號 DRAWING NO.	GN110-DV636	版本 REV.	E	核對 CHECKED	Jonny 2016/09/29	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/29	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	