

MATERIAL 

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 S D D 8 5 - 3 X X X X N N N X U - 0 0

3:Triple Row

No. of Pin Per Row(02~40)

◎G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	



N:W/O Peg

N:W/O Bump



◎T:Tube, W/O Cap
X:Box
A:Tray, W/O Cap

RoHS


N:Non Type

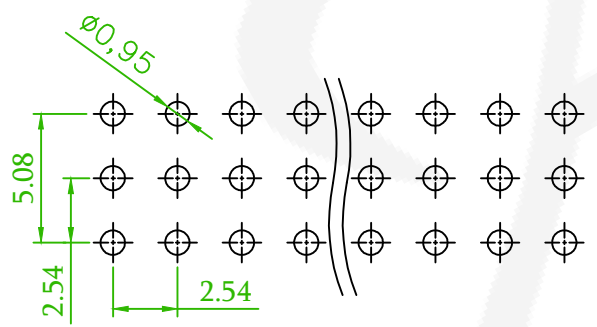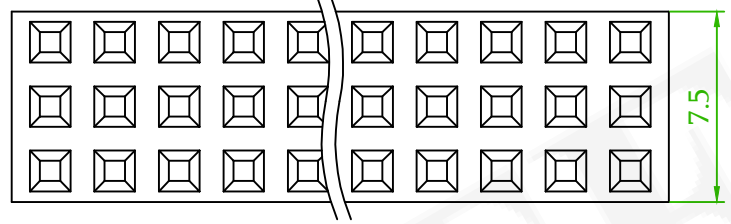


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

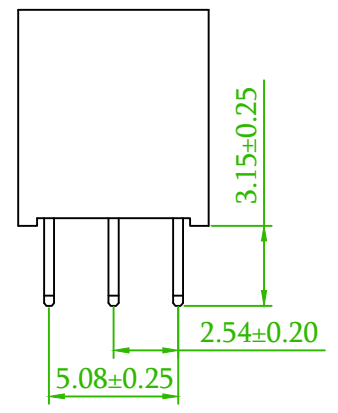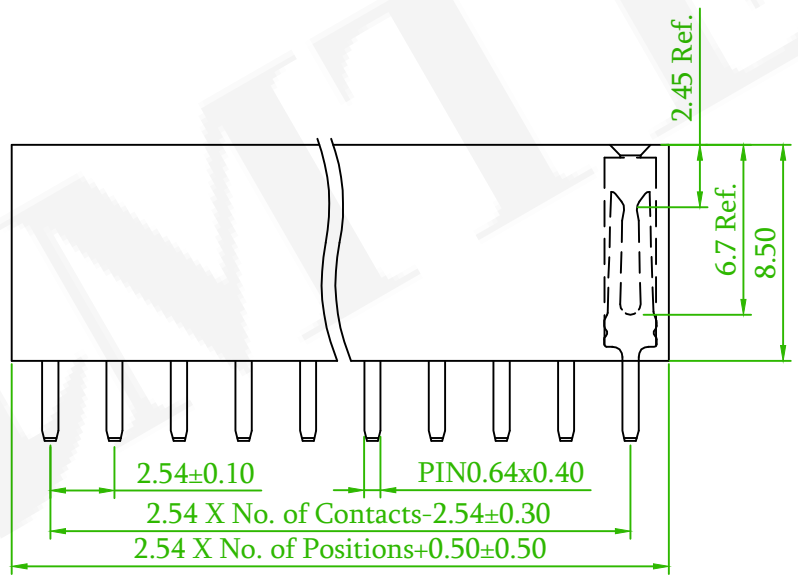

Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1SDD85-3XXXXNNNXU-00			繪圖 DRAWN	Alice 2021/06/07	
圖號 DRAWING NO.	GN147-AZ231	版本 REV.	B	核對 CHECKED	Josh 2021/06/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/06/07	
公差 TOLERANCE	.X ±0.38	.XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION 

	ECN NO.:220102 Revise the drawing	Alice	2022/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE