

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin: phosphor bronze

ORDER INFORMATION

5 P S 1 S H A 3 2 - 1 X X X X X X X U - 0 0

1:Single Row

No. of Pin
Per Row(02~40)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

©T:Tube, W/O Cap


H:Tape & Reel, W/O Cap

RoHS


N:Non Type




AMTEK 糧德
2023.03.24
Released DCC

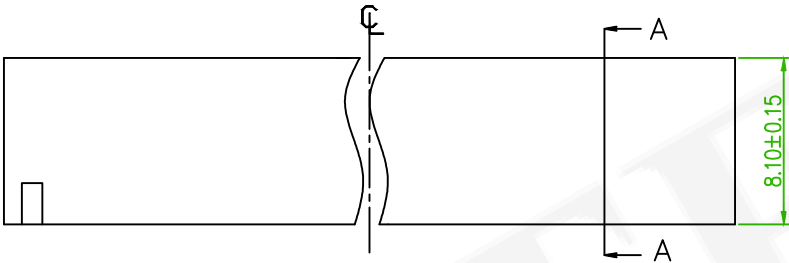


PIN Insertion direction

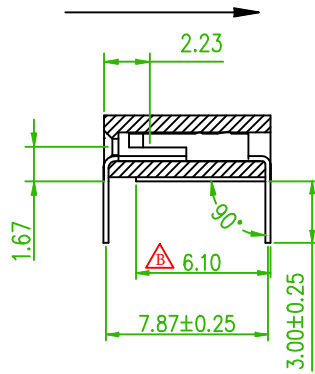

SECTION A-A

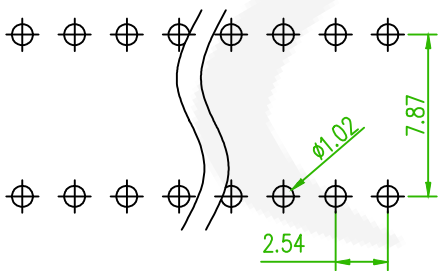

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

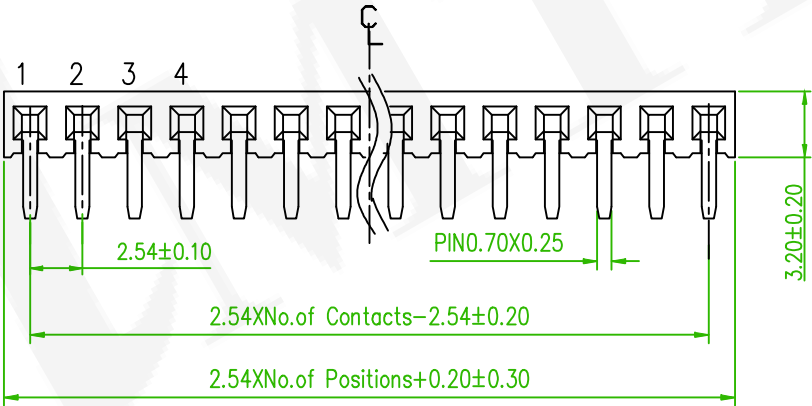

Old Part No. : PS1RS-1XX-U

△x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/15
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/13
△x1	ECN.: 200918 : Revise the drawing	David	2020/11/27
REV.	DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	△5PS1SHA32-1XXXXXXXXXU-00			繪圖 DRAWN	Mia 2018/02/21	
圖號 DRAWING NO.	GN003-MC959	版本 REV.	D	核對 CHECKED	Josh 2018/02/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/02/21	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	