

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 1 S U A 3 5 - 1 X X X X N N N X U - 0 0

◎: Standard Recommend

1: Single Row


No. of Pin Per Row (02~40)

G0: Gold Flash	S0: Selective
GA: 5u"	SA: 5u"
GB: 10u"	SB: 10u"
GC: 20u"	SC: 20u"
GD: 30u"	SD: 30u"
T0: Tin Plated	
TE: Tin 200u"	

N: W/O Peg

N: W/O Bump


N: Non Type


 T: Tube W/O Cap
H: T/R W/O Cap

RoHS





AMTEK 糧德
2022.06.27
Released DCC

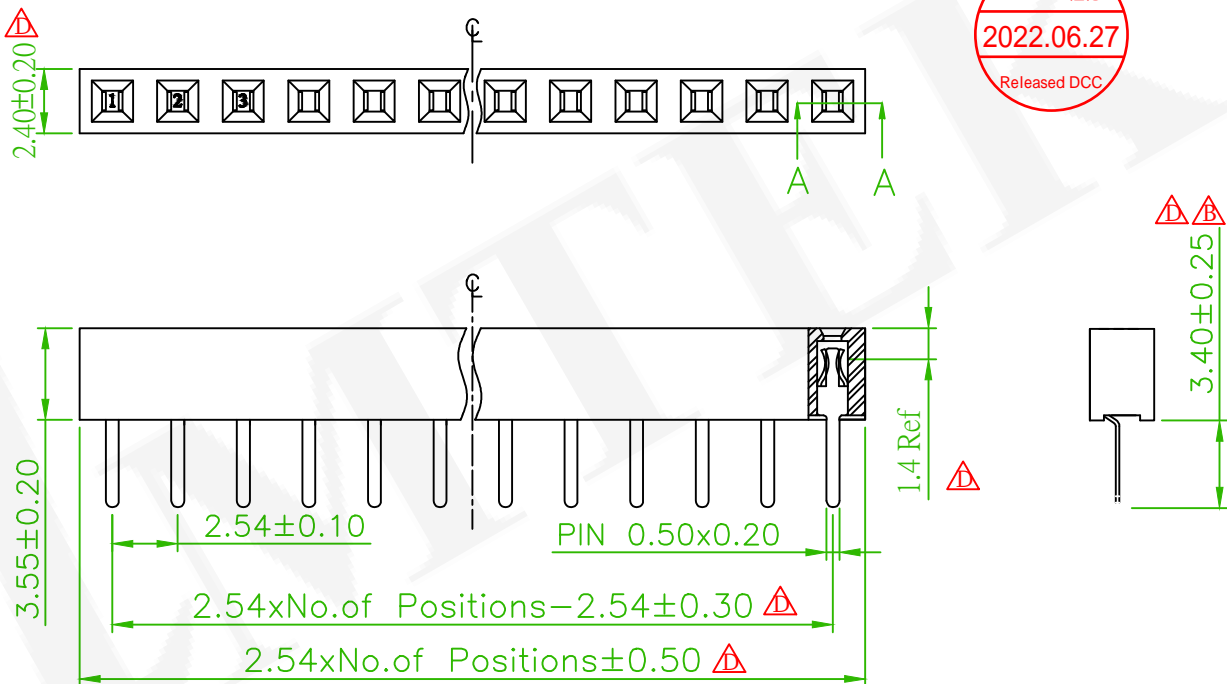




 Recommended PCB Layout
(PCB TOLERANCE ±0.05)

SECTION A-A

Old Part No. : PS1S35A-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm S/R V/T DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5PS1SUA35-1XXXXNNNXU-00			繪圖 DRAWN	Joey 2016/08/02
	圖號 DRAWING NO.	GN003-RL179	版本 REV.	E	核對 CHECKED	Boris 2016/08/02
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/02
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

 x1	ECN NO.:220102 Revise the drawing	Alice	2022/05/10
 x7	ECN 201236.: Revise the drawing	David	2021/01/29
 x1	Add the Dim.:2.5	Mia	2018/06/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE