

ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric voltage: 500V AC for one minute

Operation Temperature:-40°C to +105°C



MATERIAL

Insulator:Hi-Temp. Thermoplastic ,UL94V-0, Black


Contact Material:Copper Alloy

5 P S 2 B C A 4 3 - 2 X X X X N N N T U - 0 0

2: Dual Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	N:Non Type	RoHS
		T0:Tin Plated TE:Tin 200u"	N:W/O Bump	T:Tube W/O cap	

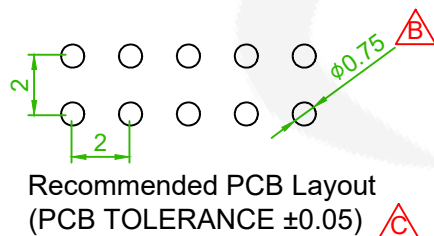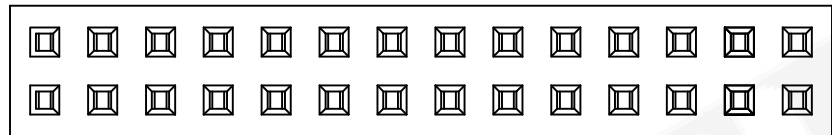

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

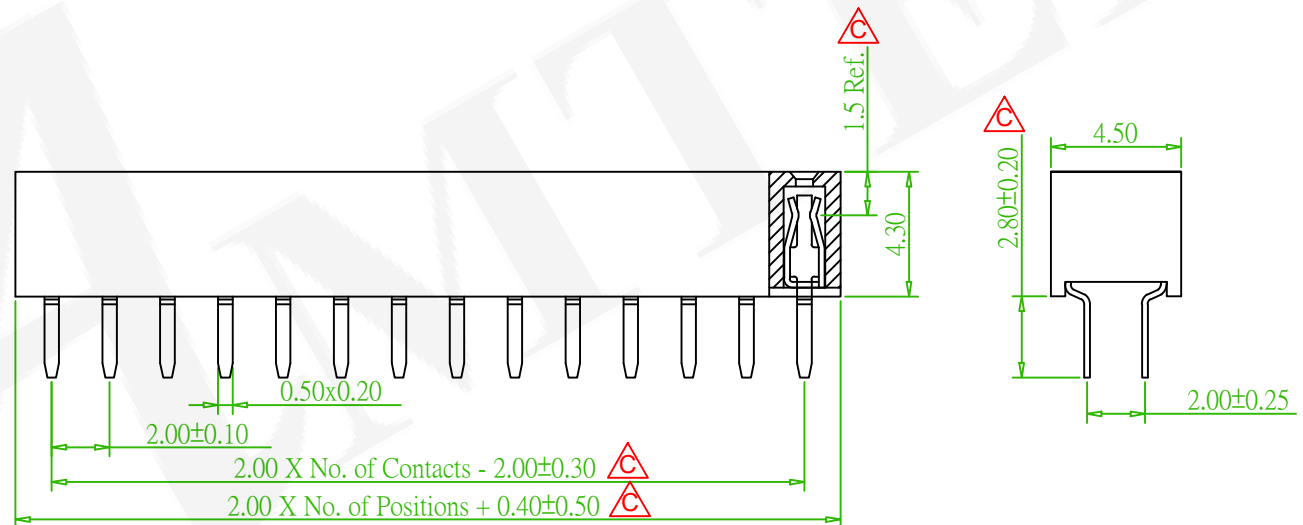

Old Part No. : PS2S43C-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2BCA43-2XXXXNNNTU-00			繪圖 DRAWN	Jeff 2016/12/05	
	圖號 DRAWING NO.	GN110-NI312	版本 REV.	C	核對 CHECKED	Johnny 2016/12/05	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/05	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Cx5	ECN.NO.210722: Revise the drawing	David	2021/08/11
Bx3	ECN.NO.190705:Cancel package option(C.H.R),Revise the Part No,DIM	Nick	2019/08/22