



MATERIAL

Insulator: Nylon 9T, UL94V-0
Contact Pin: Phosphor Bronze



ORDER INFORMATION

5 P S 2 B M A 2 7 - 2 X X X X N X N X U - 0 0

2: Dual Row	No. of Pin Per Row (02~40)	GA: 5u" GB: 10u" GC: 20u" GD: 30u"	SA: 5u" SB: 10u" SC: 20u" SD: 30u"	T0: Tin Plated TE: Tin 200u"	N: W/O Peg P: With Peg	N: W/O Bump	N: Non Type	RoHS	R: T/R with cap C: Tube with cap	H: T/R W/O cap T: Tube W/O cap
-------------	----------------------------	---	---	---------------------------------	---------------------------	-------------	-------------	------	-------------------------------------	-----------------------------------

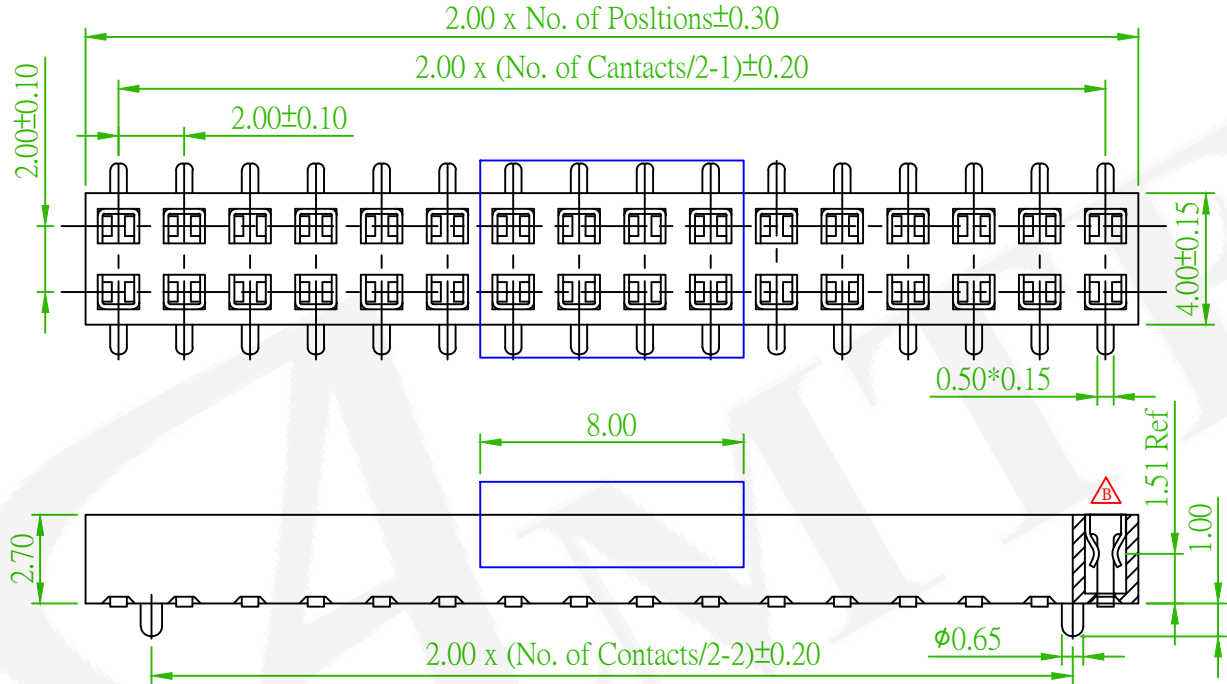

02~04 Pin

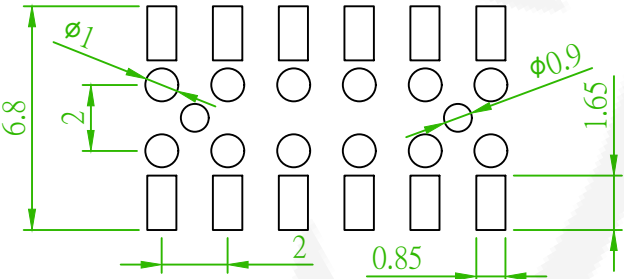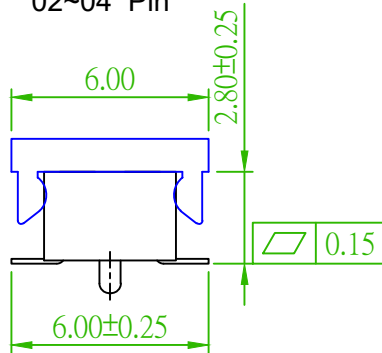

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Old Part No. : PS2BM27-2XX-U

ECN NO.:210916 Revise the drawing	Alice	2021/10/25
Add the Contact Point	Alice	2020/11/26
ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2BMA27-2XXXXNXNXU-00				繪圖 DRAWN	Athena 2015/08/26
圖號 DRAWING NO.	GN003-AL564	版本 REV.	C	核對 CHECKED	John 2015/08/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		