


Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy




A circular logo with a green border. Inside the circle, the word "certified" is at the top and "RoHS Compliant" is at the bottom, both in green. In the center, the letters "Pb" are written in large black font, with a green diagonal line striking through them from the top-left to the bottom-right.


Released DCC

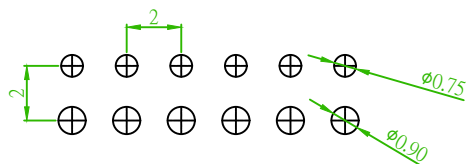

C Type

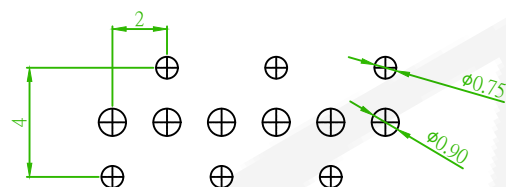


B Type

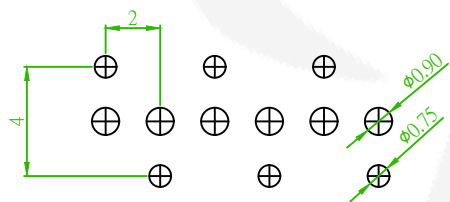


A Type


Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

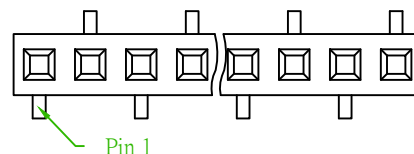


B Type

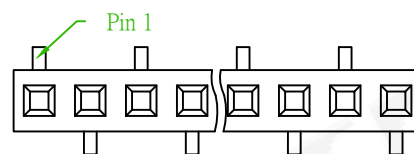


A Type

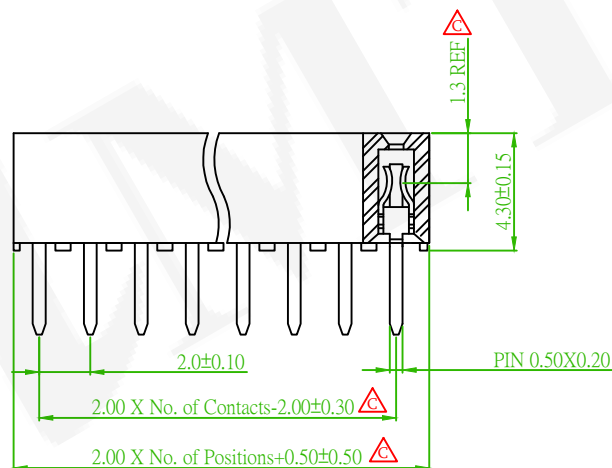

C Type

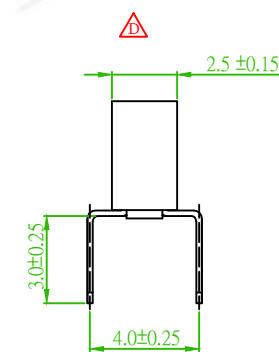


A,B Type



C Type

Old Part No. : PS2S43B-1XX-U

 Dx4	ECN NO.230305: Revise the drawing	Rex	2023/03/16
 Cx4	ECN NO.210631: Revise the drawing	David	2021/07/01
 Bx1	Add the Recommended Mating Part	Eric	2019/01/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	FEMALE HEADER 2.0mm					頁數 Page	1/1
品號 PART NO.	5PS2BSA43-1XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/26	
圖號 DRAWING NO.	GN110-DW510	版本 REV.	D	核對 CHECKED	Josh 2019/01/30		
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/30		
公差 TOLERANCE	X ± 0.38 XX ± 0.25	X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION		