

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 B S A 4 3 - 2 X X X X N N A X U - 0 0

2: Dual Row

No. of Pin
Per Row(03~40)

G0: Gold Flast

GA: 5u"

GB: 10u"

GC: 20u"

GD: 30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA: 5u"

SB: 10u"

SC: 20u"

SD: 30u"

N: W/O Peg

N: W/O Bump

T: Tube, W/O Cap


H: Tape & Reel, W/O Cap

A: A Type

RoHS



AMTEK 糧德
2021.11.01
Released DCC

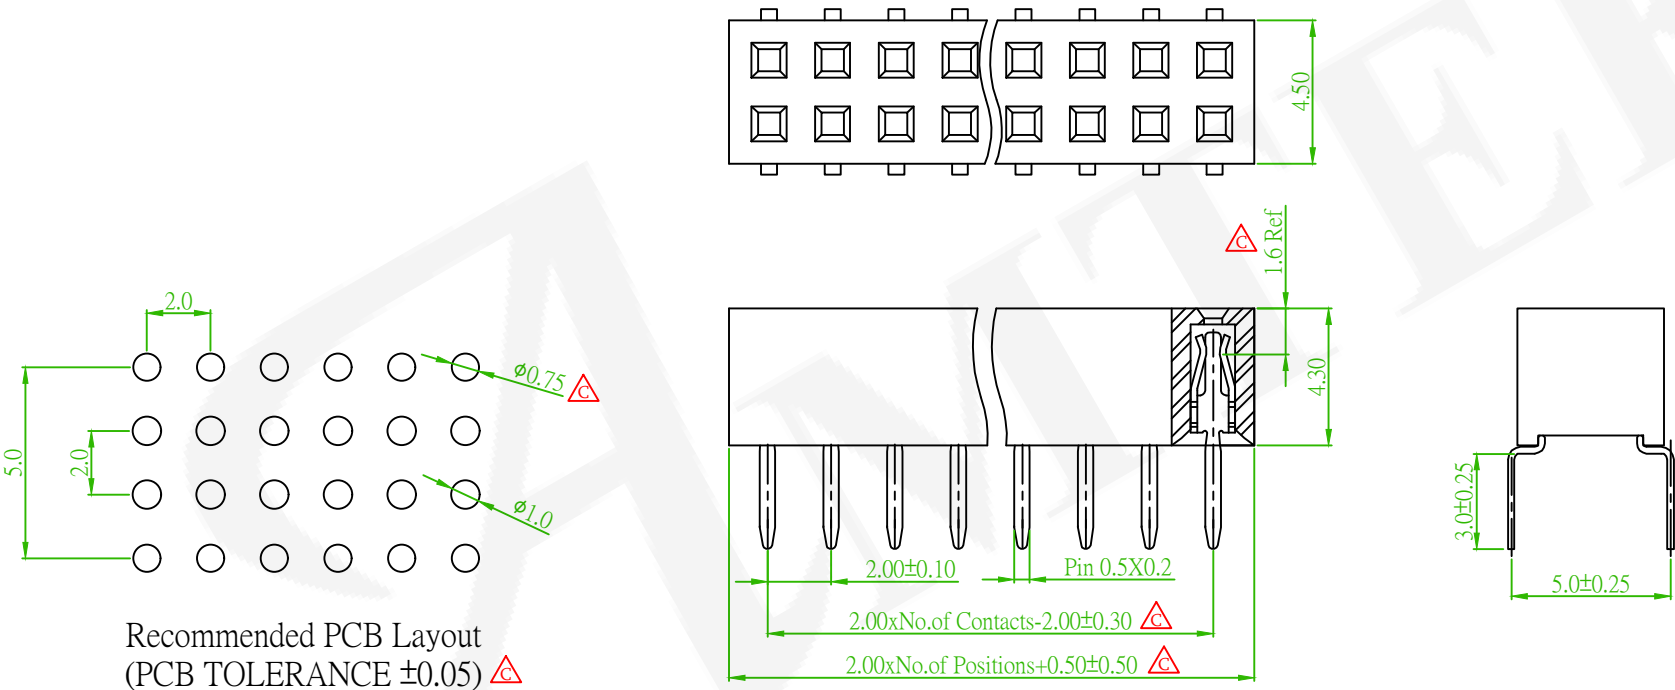

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS2S43B-2XX-A-U

D x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/14
A x6	ECN NO.210667: Revise the drawing	David	2021/07/23
B x1	Add the Recommended Mating Part	Eric	2019/01/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2BSA43-2XXXXNNAXU-00				繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.	GN110-DW522	版本 REV.	D	核對 CHECKED	Josh 2019/01/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/30	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	