

ORDER INFORMATION

SPECIFICATIONS

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40 °C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

5 P S 2 E A A 6 3 - 3 X X X X 5 X U 935228 - 0 0



3: Triple Row

No. of Pin
Per Row(02~40)


GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0: Tin Plated	
TE: Tin 200u"	

X: Box	B: Bag
R: T/R with cap	H: T/R W/O cap
C: Tube with cap	T: Tube W/O cap


U: RoHS+Hi Temp

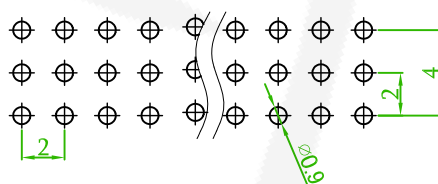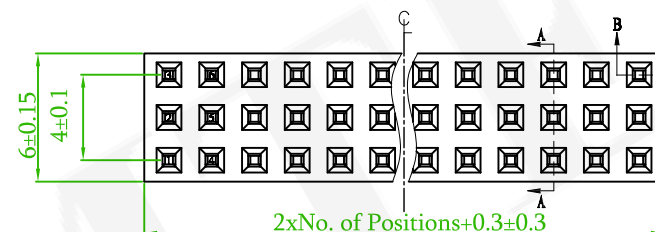

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

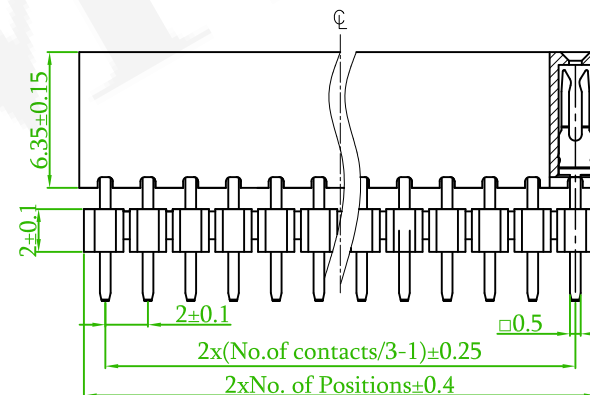

SECTION B-B



SECTION A-A

Old Part No. : PS2E-3XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm T/R V/T DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5PS2EAA63- 3XXXXX5XU935228-00			繪圖 DRAWN	Jeff 2016/12/01
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny 2016/12/01
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/01
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION