

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.


Dielectric Voltage: 500V AC for one minute

Operation Temperature:-40°C to +105°C

MATERIAL



Insulator:Hi-Temp. Thermoplastic,UL 94V-0, Black

Contact Pin:Copper Alloy

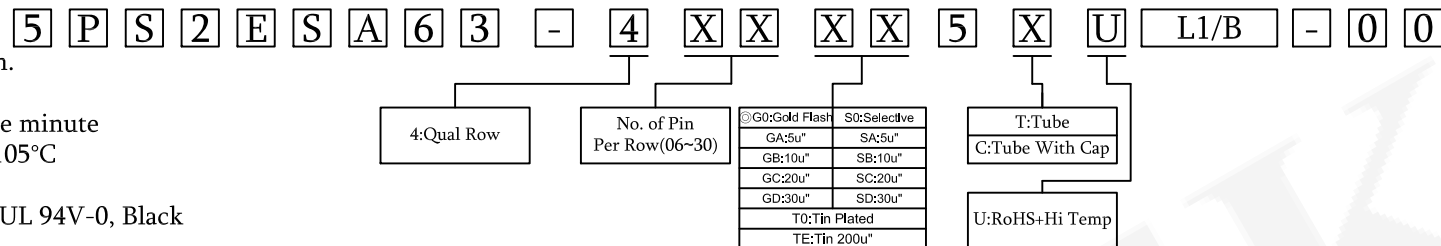


AMTEK 糧德
2018.06.28
Released DCC

Part No	L1	B
5PS2ESA63-4XXX5XU094023-00	9.35	2.28
5PS2ESA63-4XXX5XU150018-00	15.0	1.8

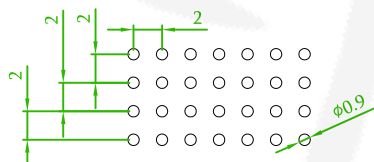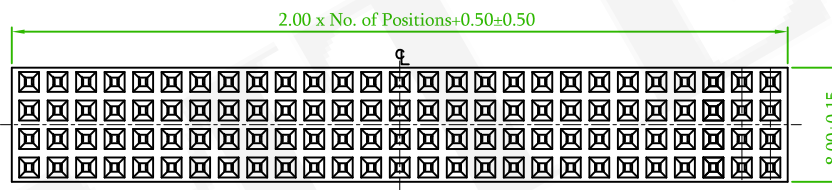

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

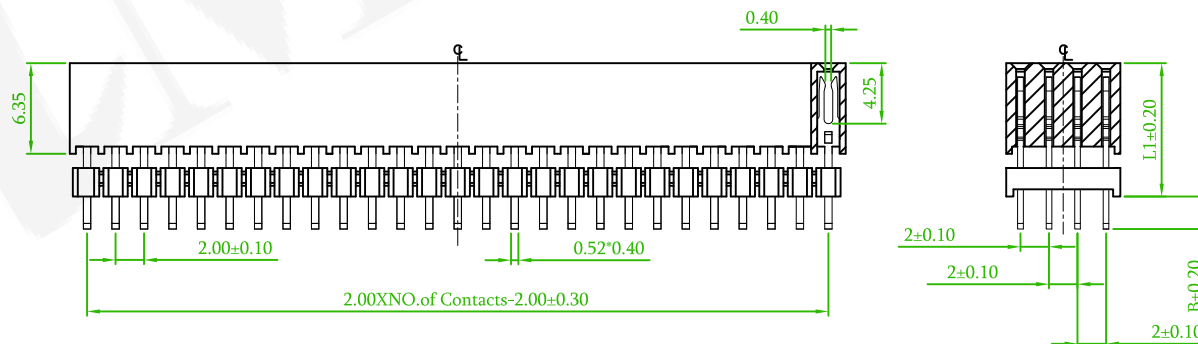

Old P/N:PS2E-4XX-U

	Add the Dim Table	Mia	2018/06/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm Q/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	 5PS2ESA63- 4XXXXX5XUXXXXXX-00			繪圖 DRAWN	Volvo 2008/06/06	
圖號 DRAWING NO.	GN003-RL176	版本 REV.	B	核對 CHECKED	Paul 2008/06/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2008/06/06	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	