

SPECIFICATION



Current Rating: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy

ORDER INFORMATION

5 P S 2 M H A 2 0 - 1 X X X X X X X U - 0 0

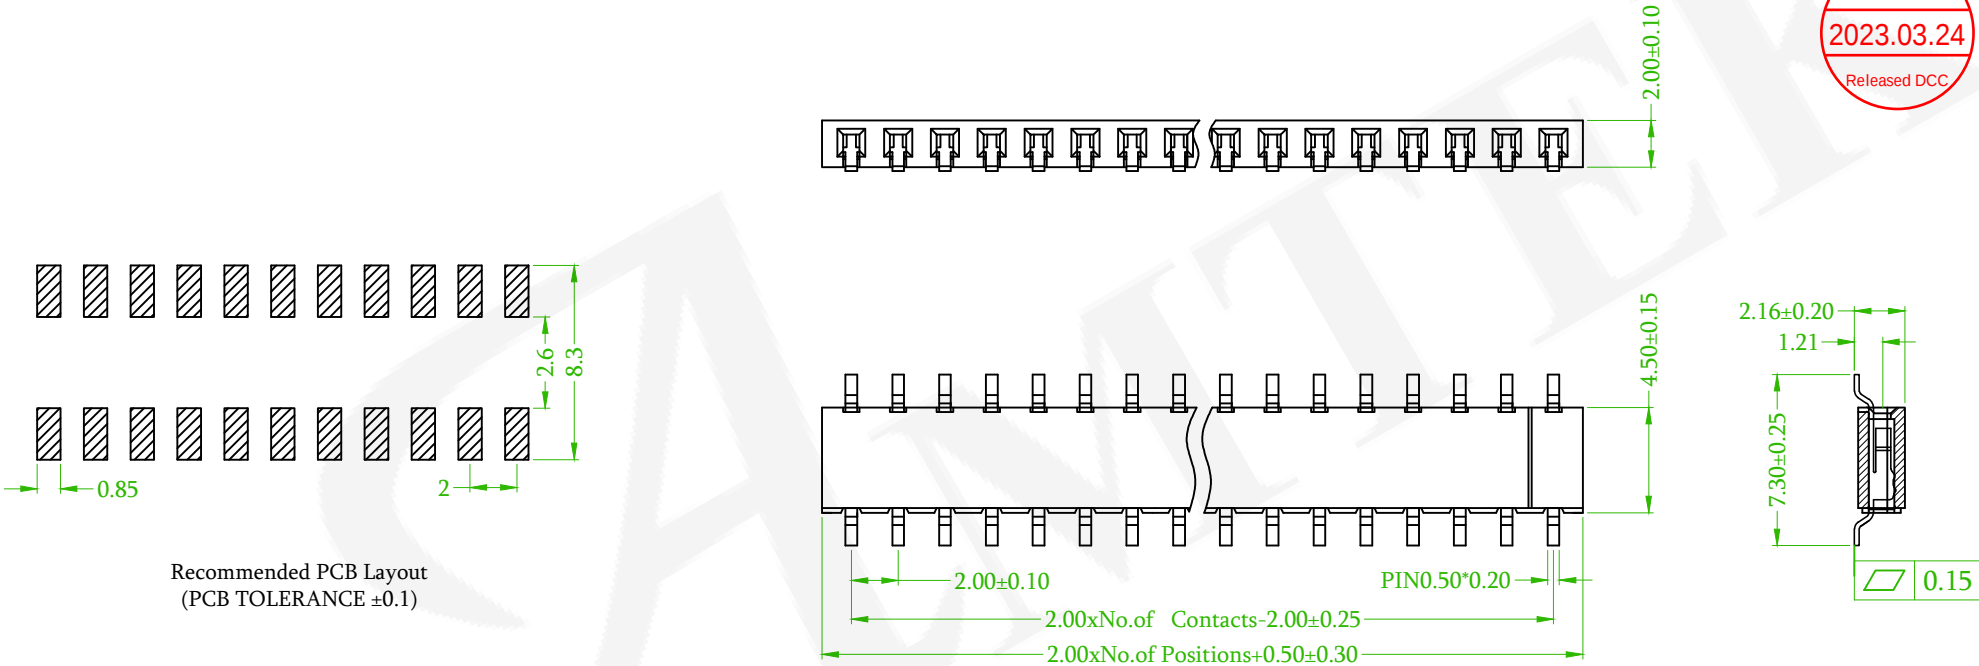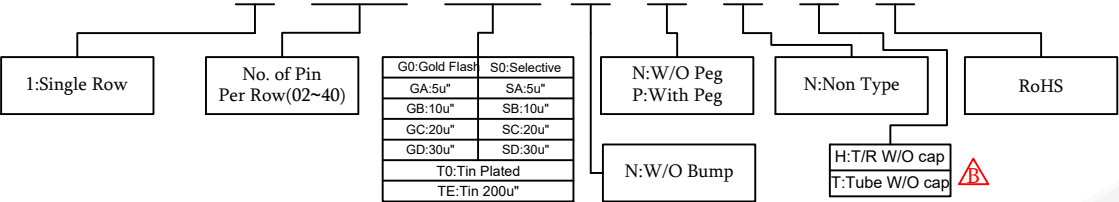

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PS2MS-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/16



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	△ 5PS2MHA20-1XXXXXXXXXU-00				繪圖 DRAWN	Sinnys 2008/07/17
圖號 DRAWING NO.	GN003-RL173	版本 REV.	B	核對 CHECKED	Paul 2008/07/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2008/07/17	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		