

ORDER INFORMATION

Specifications

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature:-40°C to +105°C







Material

Insulator:Hi-Temp. Thermoplastic, UL94V-0

Terminal: Copper Alloy

5 P S 2 M S A 3 5 - 2 X X X X N X N X U - 0 0

2:Dual Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u" S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg P:With Peg	N:Non Type	RoHS
			N:W/O Bump	R:T/R with cap C:Tube with cap	H:T/R W/O cap T:Tube W/O cap

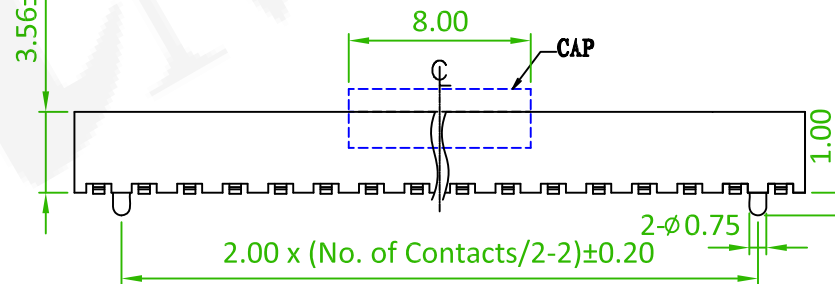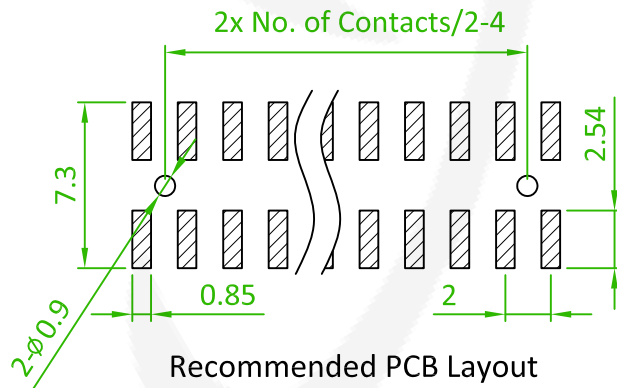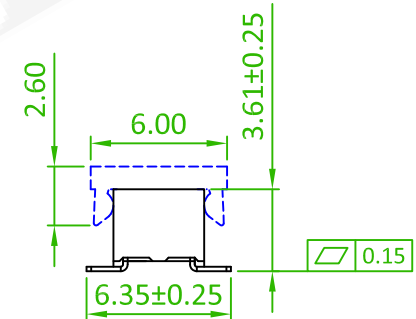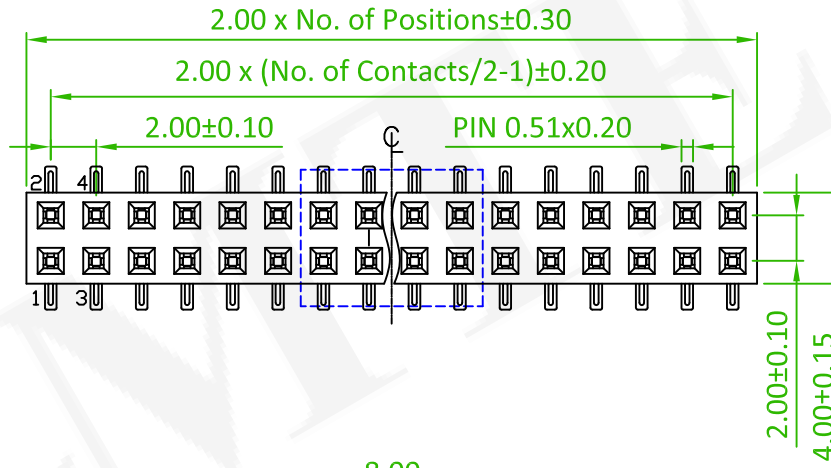

Old Part No. : PS2M35-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm			頁數 Page	1/1
	品號 PART NO.	5PS2MSA35-2XXXXNXNXU-00			繪圖 DRAWN	Athena 2015/08/26
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/08/26
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26
	公差 TOLERANCE	.X ±0.30 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	