


ORDER INFORMATION

Operation Temperature:-40°C to +105°C

Contact Pin:Copper Alloy


5 P S 2 M S C 2 1 - 2 X X X X N X N X U - 0 0

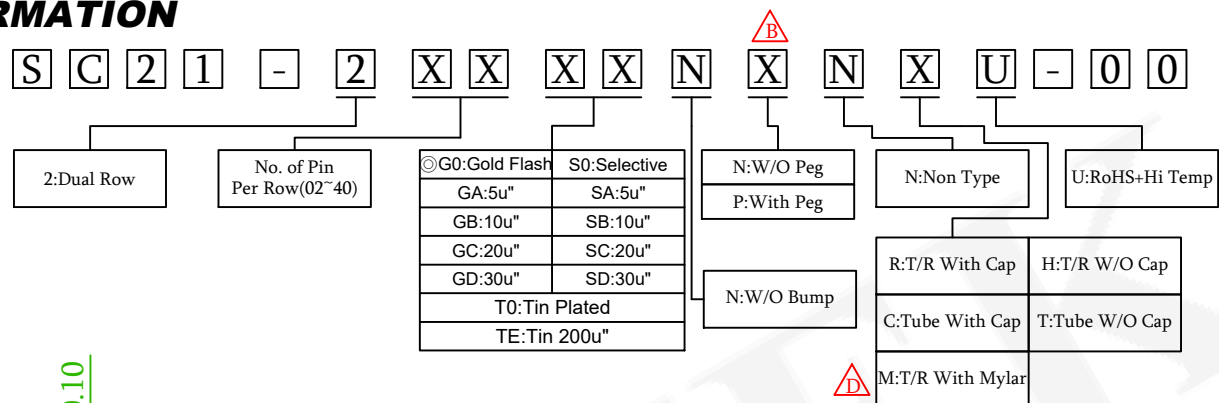


AMTEK 糧德

2021.05.18


Released DCC




 D Mylar

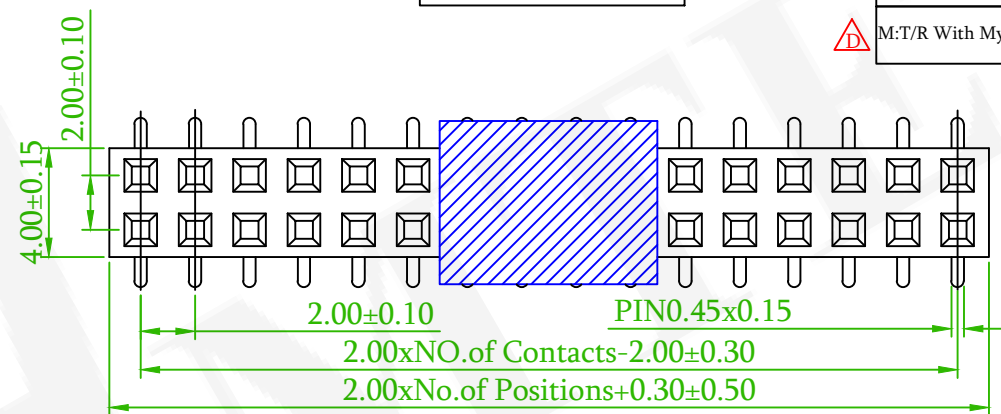

DIM.X	NOTE
8.00	05~40PIN
4.00	02~04PIN

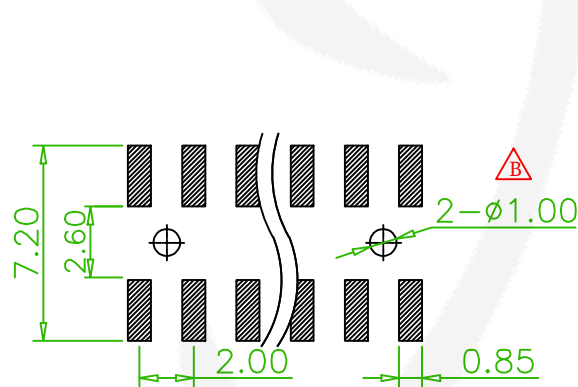

Recommended PCB Layout
(PCB TOLERANCE ± 0.05) 

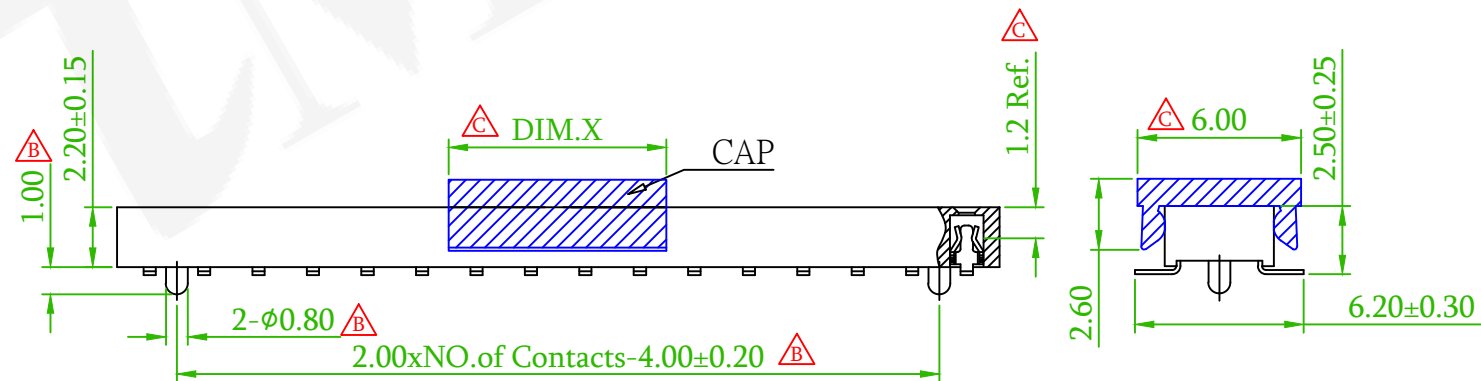

品名 TITLE	FEMALE HEADER 2.0mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS2MSC21-2XXXXNXNXU-00			繪圖 DRAWN	Benson 2019/11/01	
圖號 DRAWING NO.	GN147-BS434	版本 REV.	D	核對 CHECKED	Josh 2019/11/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/01	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	.X° ±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

 x2	Add the T/R+Mylar	Alice	2021/05/18
 x4	ECN NO.:210123 Revise the Drawing	Benson	2021/02/08
 x6	Add the Peg	David	2020/09/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE