

MATERIAL

Insulator:Nylon 9T , UL94V-0, Black △F
Contact: Phosphor Bronze △F

ORDER INFORMATION

5

P

S

2

M

S

D

4

0

-

2

X

X

X

X

N

X

N

X

U

-

0

0

2: Dual Row

No. of Contact
Per Row (02~40)

G0: Gold Flash

GA: 5u"

GB: 10u"

GC: 20u"

GD: 30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA: 5u"

SB: 10u"

SC: 20u"

SD: 30u"

N: W/O Peg
P: With Peg

N: W/O Bump

N: NON Type

T: Tube W/O Cap

C: Tube With Cap

H: T/R W/O Cap

R: T/R With Cap



RoHS





AMTEK 耀德

2021.11.01

Released DCC

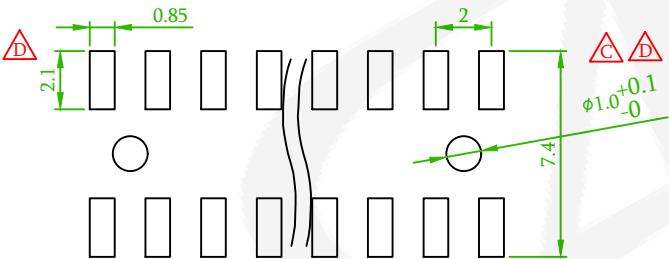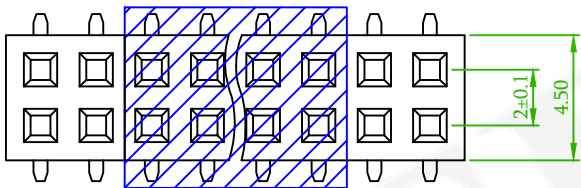

Recommended PCB Layout
(PCB TOLERANCE ±0.05) △D

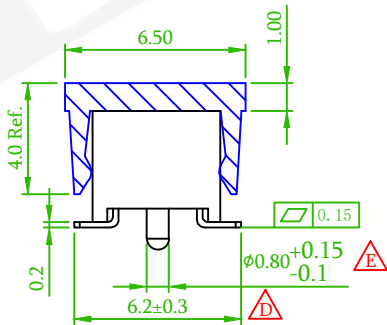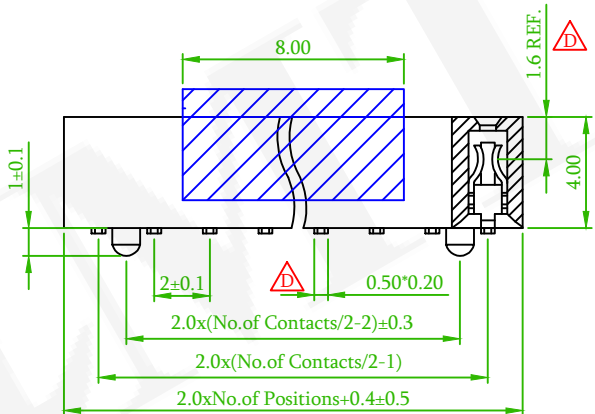

Old Part No.:PS2M40-2XX-U

△F x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/14
△E x1	ECN NO.210710: Revise the drawing	Alice	2021/09/06
△D x6	ECN NO.210733: Revise the drawing	David	2021/07/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2MSD40-2XXXXNXNXU-00				繪圖 DRAWN	Roy 2017/07/13
圖號 DRAWING NO.	GN016-RL860	版本 REV.	F	核對 CHECKED	Josh 2019/02/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/01	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	