

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Phosphor Bronze

ORDER INFORMATION

5 P S 2 R D A 4 3 - 1 X X X X N N N X U - 0 0



1:Single Row

No. of Pin
Per Row(02~40)



◎G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

◎T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel, W/O Cap
R:Tape & Reel, With Cap
N:Non Type

RoHS

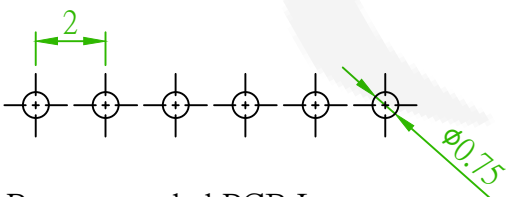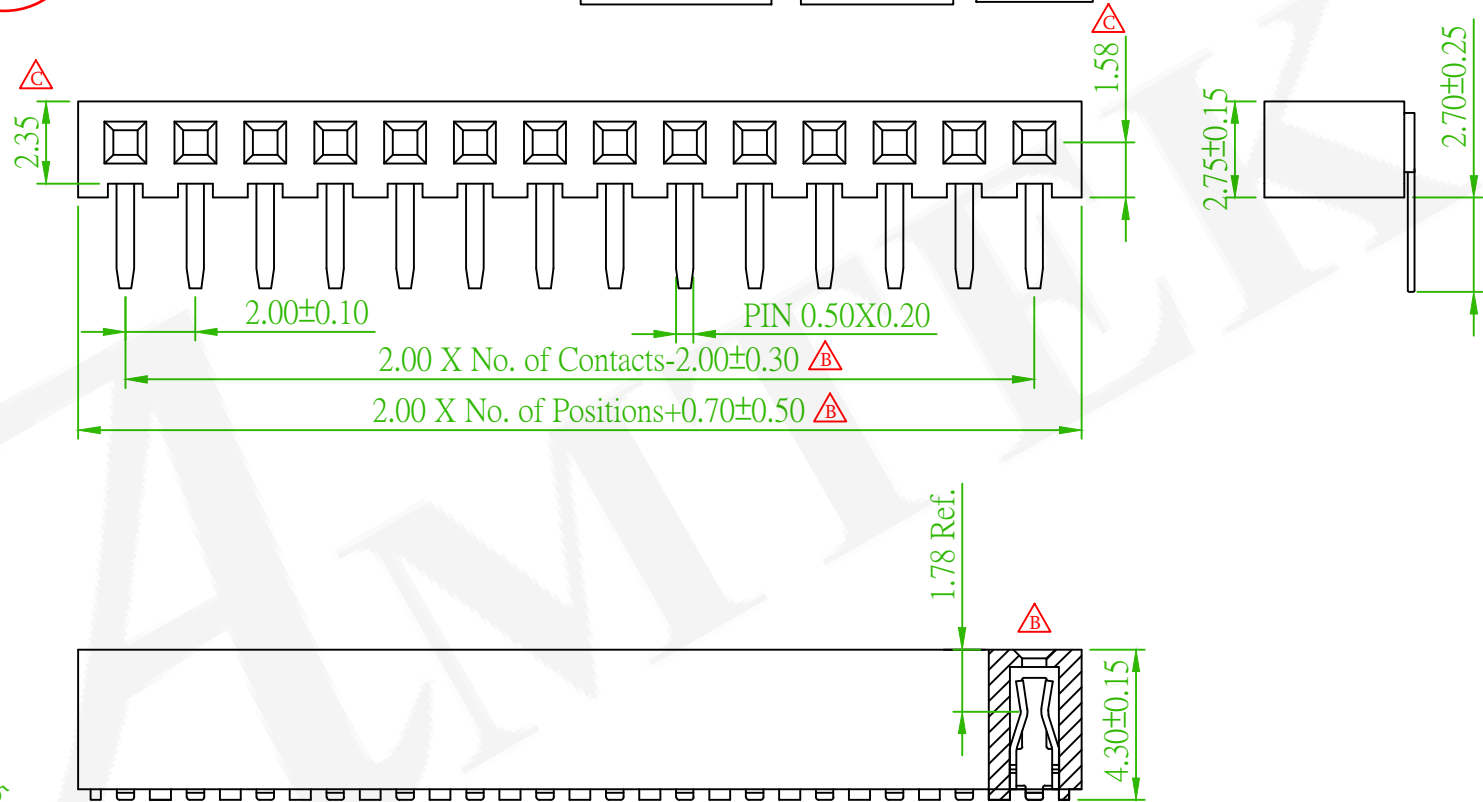

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No. : PS2R43-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2RDA43-1XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/26
	圖號 DRAWING NO.	GN003-AZ118	版本 REV.	C	核對 CHECKED	John 2015/08/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
	公差 TOLERANCE	.XX $\pm$ 0.25 .X $\pm$ 3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	ECN NO.:220501 Add the Dimensions	Benson	2022/05/21
△x4	ECN NO.:210525 Revise the drawing	Alice	2021/6/4