





MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 R D B 4 9 - 2 X X X X N N N T U - 0 0

2: Dual Row	No. of Pin Per Row(02~22)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" TO: Tin Plated TE: Tin 200u"	S0: Selective SA:5u" SB:10u" SC:20u" SD:30u"	N: W/O Peg N: W/O Bump	◎T: Tube, W/O Cap N: Non Type	RoHS
-------------	------------------------------	--	--	---------------------------	----------------------------------	------

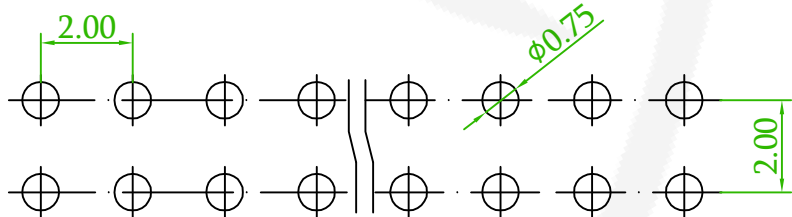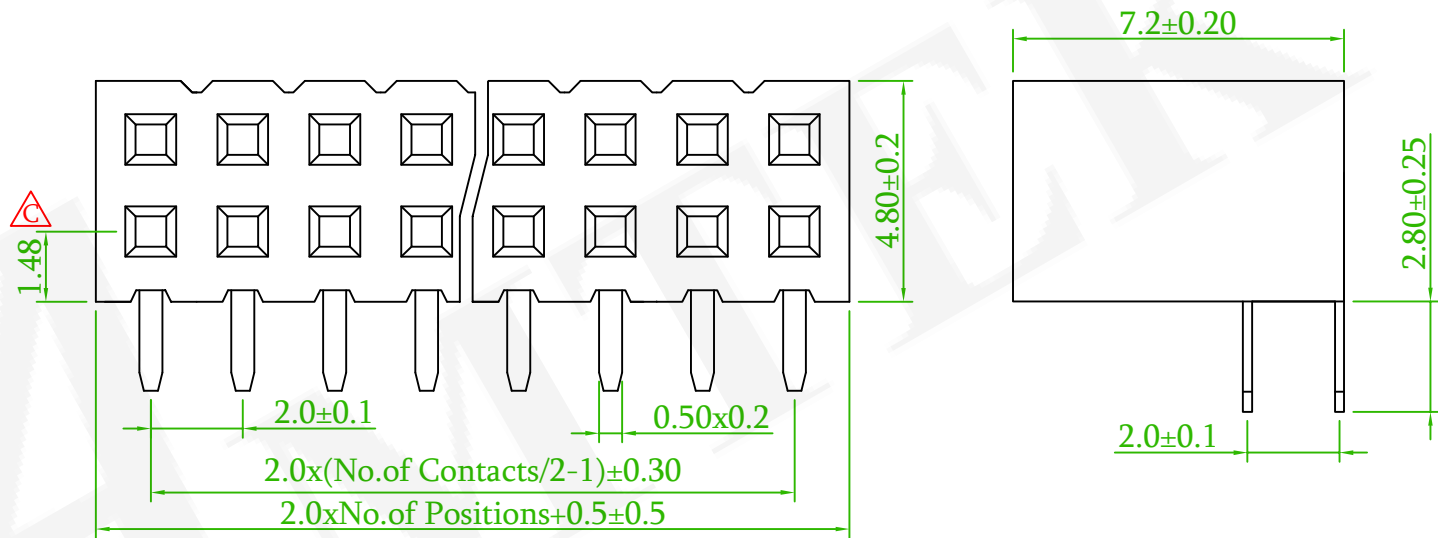

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2RDB49-2XXXXNNNTU-00				繪圖 DRAWN	Nick 2019/11/04
	圖號 DRAWING NO.	GN110-NI488	版本 REV.	C	核對 CHECKED	Josh 2019/11/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/04	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C x1	Add the Dimintions	Benson	2023/02/10
△B x1	202110270006: Revise the Material	David	2021/10/28