

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

2: Dual Row

No. of Pin Per Row(02~40)

©G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bum



T:Tube, W/O Cap

A:Trav W/O Cap

	N:Non Type
--	------------

RoHS


01:2.3mm

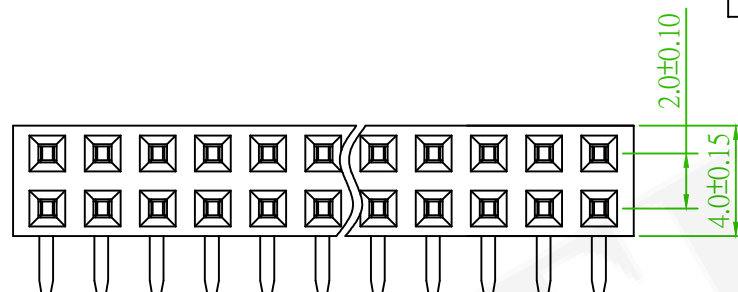

Recommended PCB Layout

(PCB TOLERANCE ± 0.05) 

 x7	ECN NO.:210729 Revise the drawing	Alice	2021/08/12
 x1	Add the Dim. A: 5.0mm	Andy	2018/03/01
 x1	Add the Package:Tray	Mia	2017/12/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	FEMALE HEADER 2.0mm R/A D/R DIP TYPE					頁數 Page	1/1
品號 PART NO.	5PS2RDB63-2XXXXNNNXU-0X				繪圖 DRAWN	Roy 2016/05/19	
圖號 DRAWING NO.	GN110-RL313	版本 REV.	D	核對 CHECKED	Josh 2018/03/01		
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/01		
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION		