

ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black



Contact Pin:Copper Alloy

5 P S 2 S D A 4 3 - 2 X X X X B N N X U - 0 0

2: Dual Row	No. of Pin Per Row(02~25)	G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	N: W/O Peg	T: Tube, W/O Cap C: Tube, With Cap H: Tape & Reel, W/O Cap R: Tape & Reel, With Cap	RoHS
		T0: Tin Plated TE: Tin 200u"	B: With Bump	N: Non Type	



AMTEK 耀德
2021.07.01
Released DCC

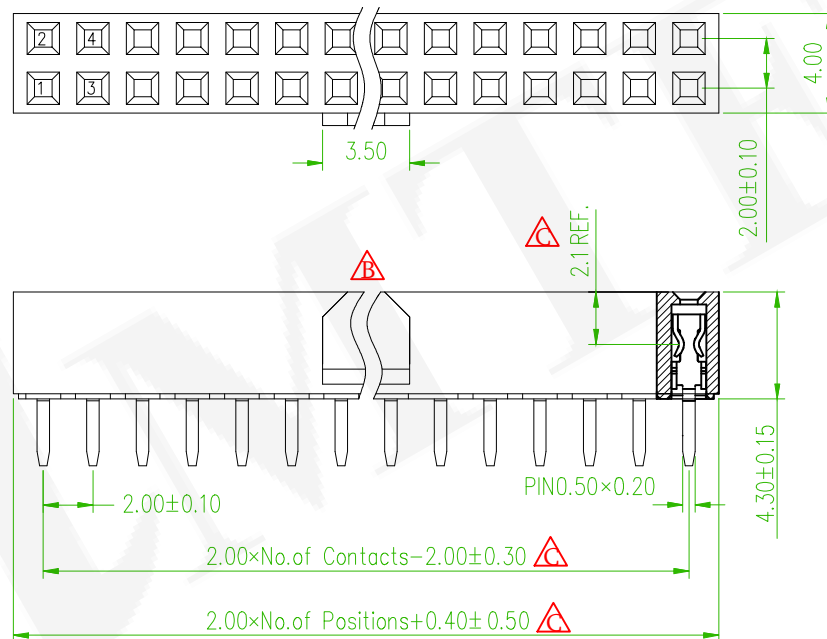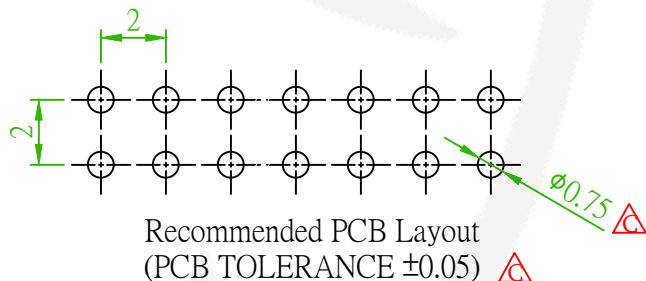

Old Part No. : PS2SB43-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2SDA43-2XXXXBNNXU-00				繪圖 DRAWN	Jeff 2015/08/27
	圖號 DRAWING NO.	GN003-BS277	版本 REV.	C	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A5	ECN NO. 210618 Revise the drawing	David	2021/07/01
B2	ECN NO. 190813 Revise the drawing	Benson	2019/09/16