

ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy

5

P

S

2

S

D

A

4

3

-

2

X

X

X

X

N

N

N

X

U

-

0

0

2: Dual Row

No. of Pin
Per Row(02~40)

GA:5u"SA:5u"

GB:10u"SB:10u"

GC:20u"SC:20u"

GD:30u"SD:30u"

T0: Tin Plated

TE: Tin 200u"

N: W/O Peg

N: W/O Bump

T: Tube, W/O Cap


C: Tube, With Cap

H: Tape & Reel, W/O Cap

R: Tape & Reel, With Cap

N: Non Type

RoHS

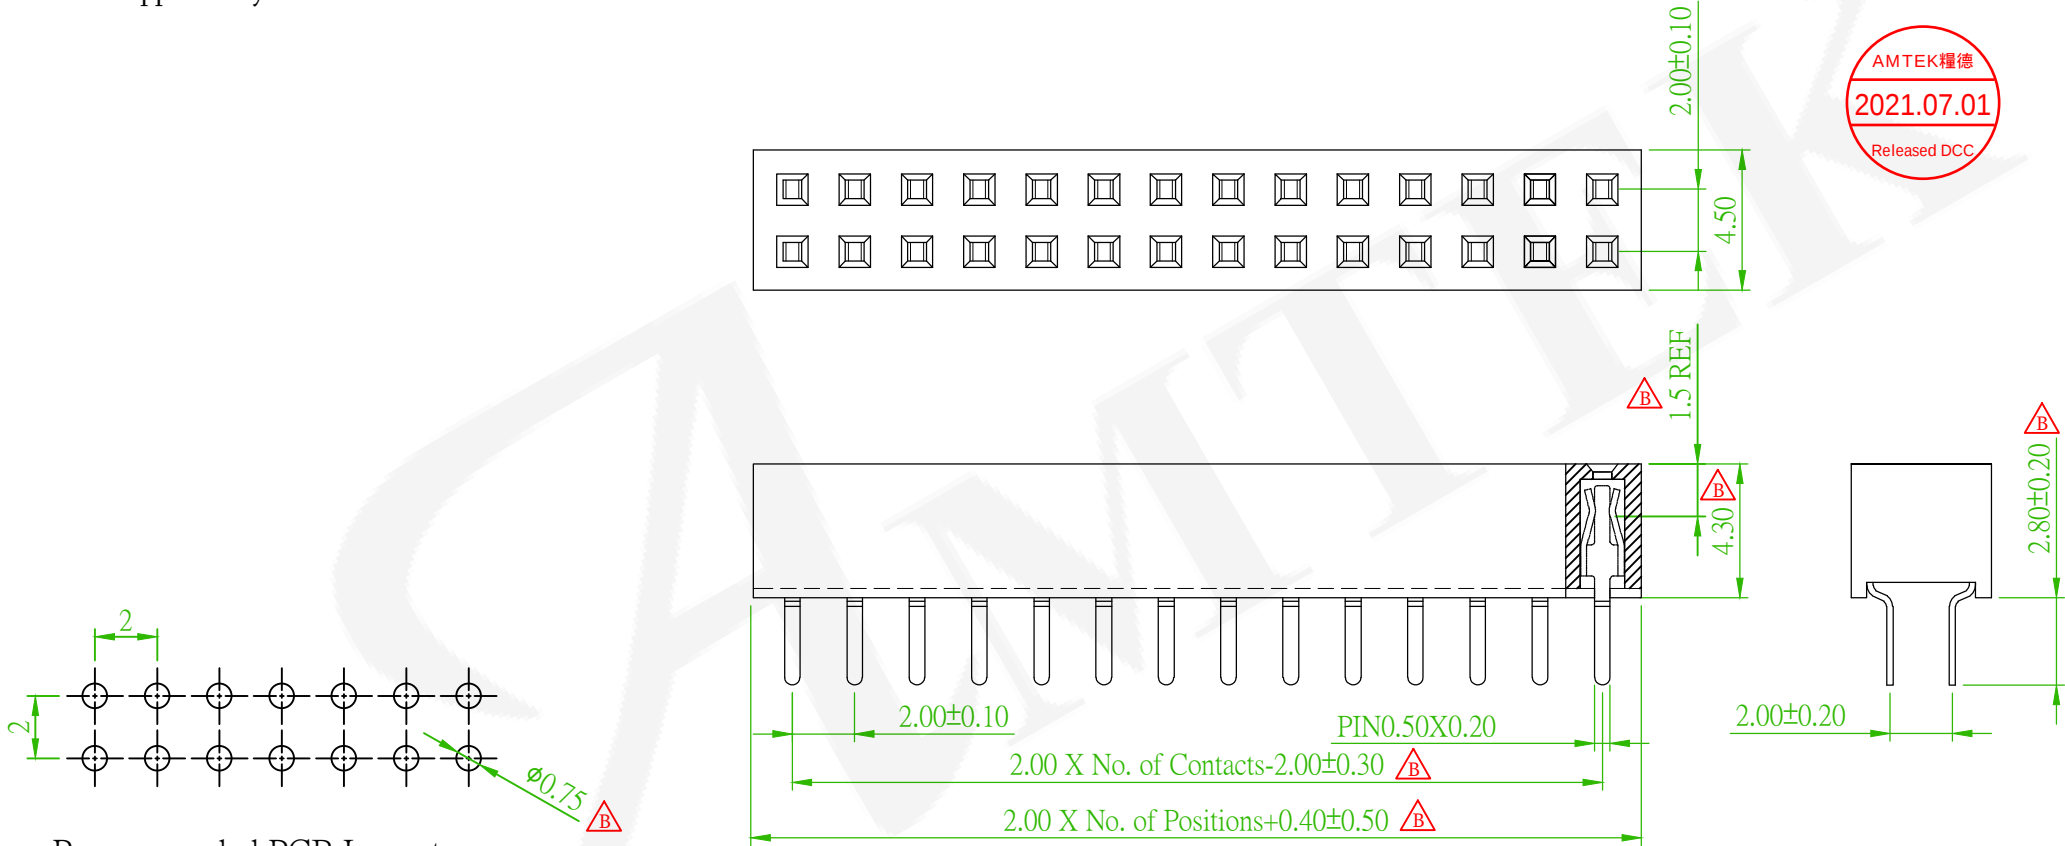

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS2S43-2XX-U

ECN NO.210617: Revise the drawing	David	2021/07/01	
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2SDA43-2XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.	GN147-DW504	版本 REV.	B	核對 CHECKED	John 2015/08/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	