


ORDER INFORMATION

SPECIFICATION


Current Rating: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy

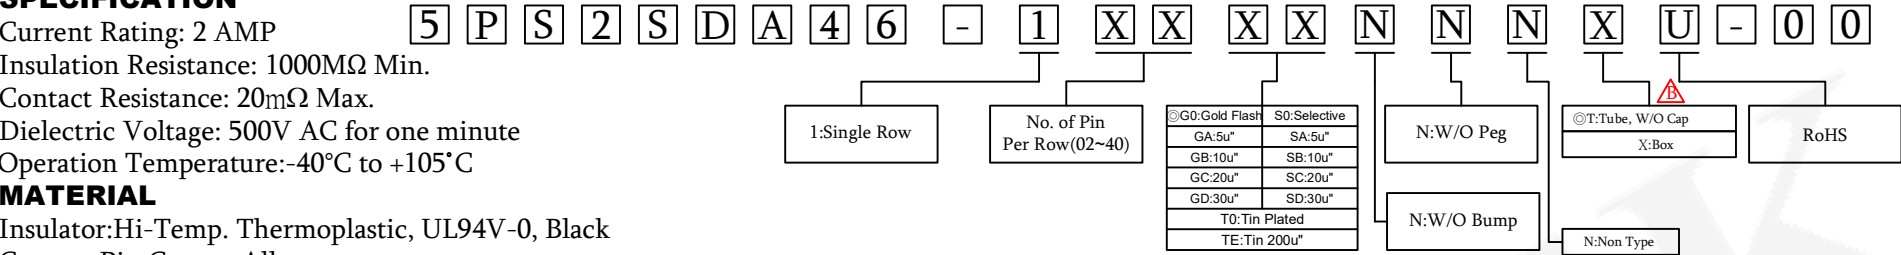

AMTEK 糧德
2021.06.07
Released DCC

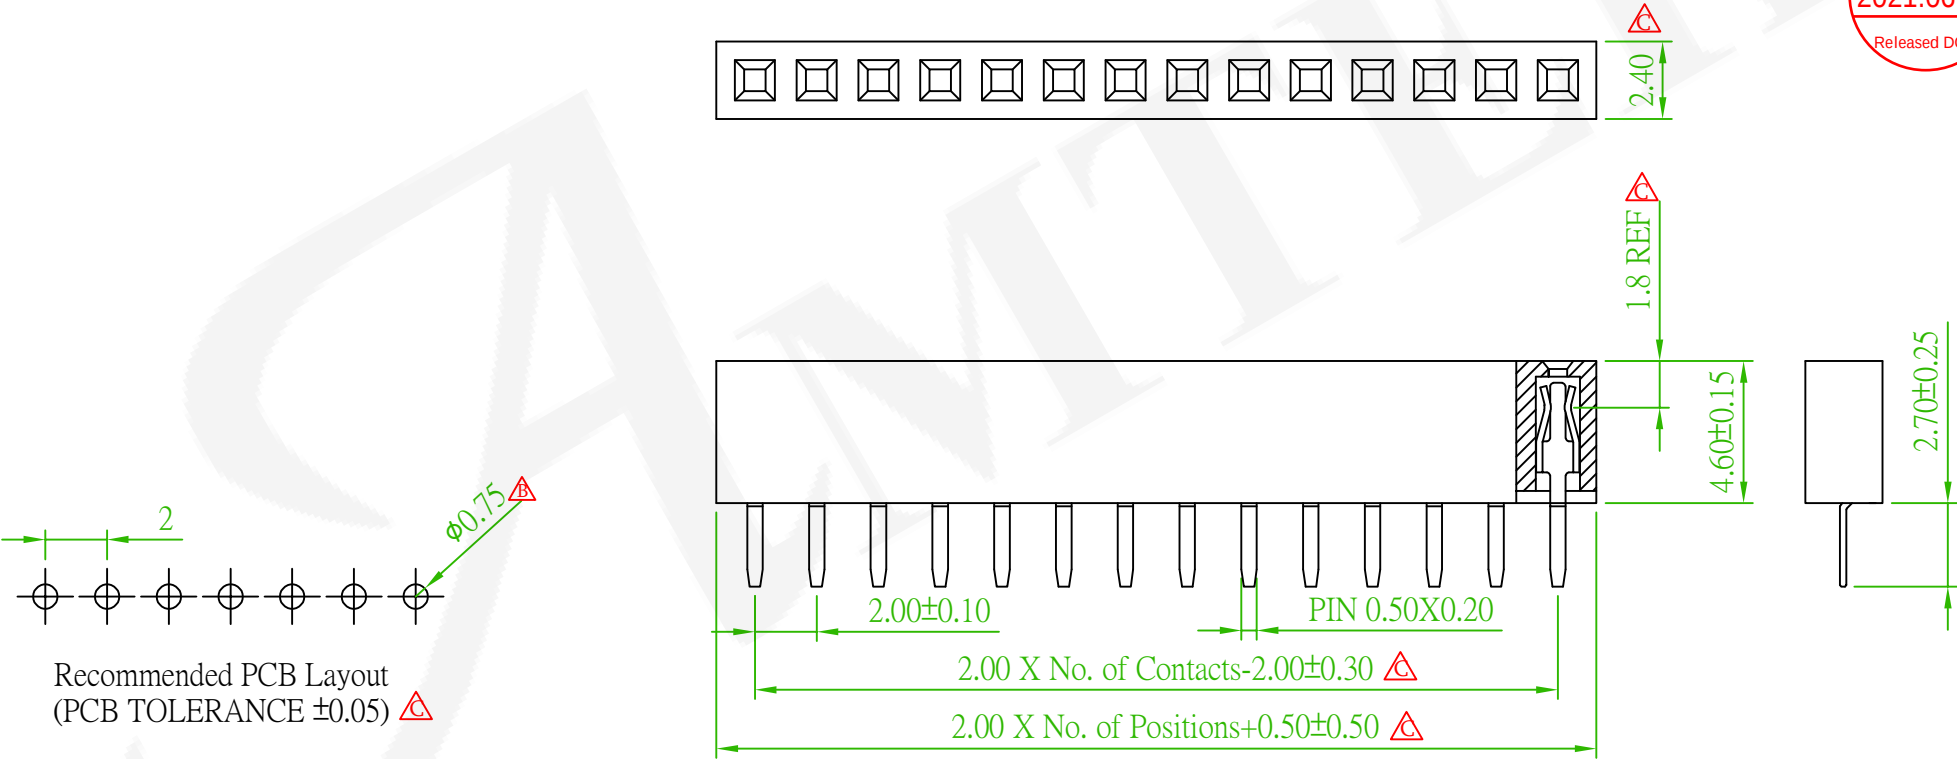

Old Part No. : PS2S46-1XX-U

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2SDA46-1XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/26
	圖號 DRAWING NO.	GN110-NI387	版本 REV.	C	核對 CHECKED	John 2015/08/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x5	ECN.NO.210533:Revise the drawing	David	2021/06/04
△x2	ECN.NO.190705:Cancel package option(C.H.R),add package option(X:Box) Revise the DIM	Nick	2019/09/27