

ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy

5

P

S

2

S

D

A

4

6

-

2

X

X

X

X

N

N

N

X

U

-

0

0

2: Dual Row

No. of Pin
Per Row(02~40)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump

T: Tube, W/O Cap

C: Tube, With Cap

H: Tape & Reel, W/O Cap


R: Tape & Reel, With Cap

N: Non Type

RoHS



AMTEK 耀德
2021.06.15
Released DCC

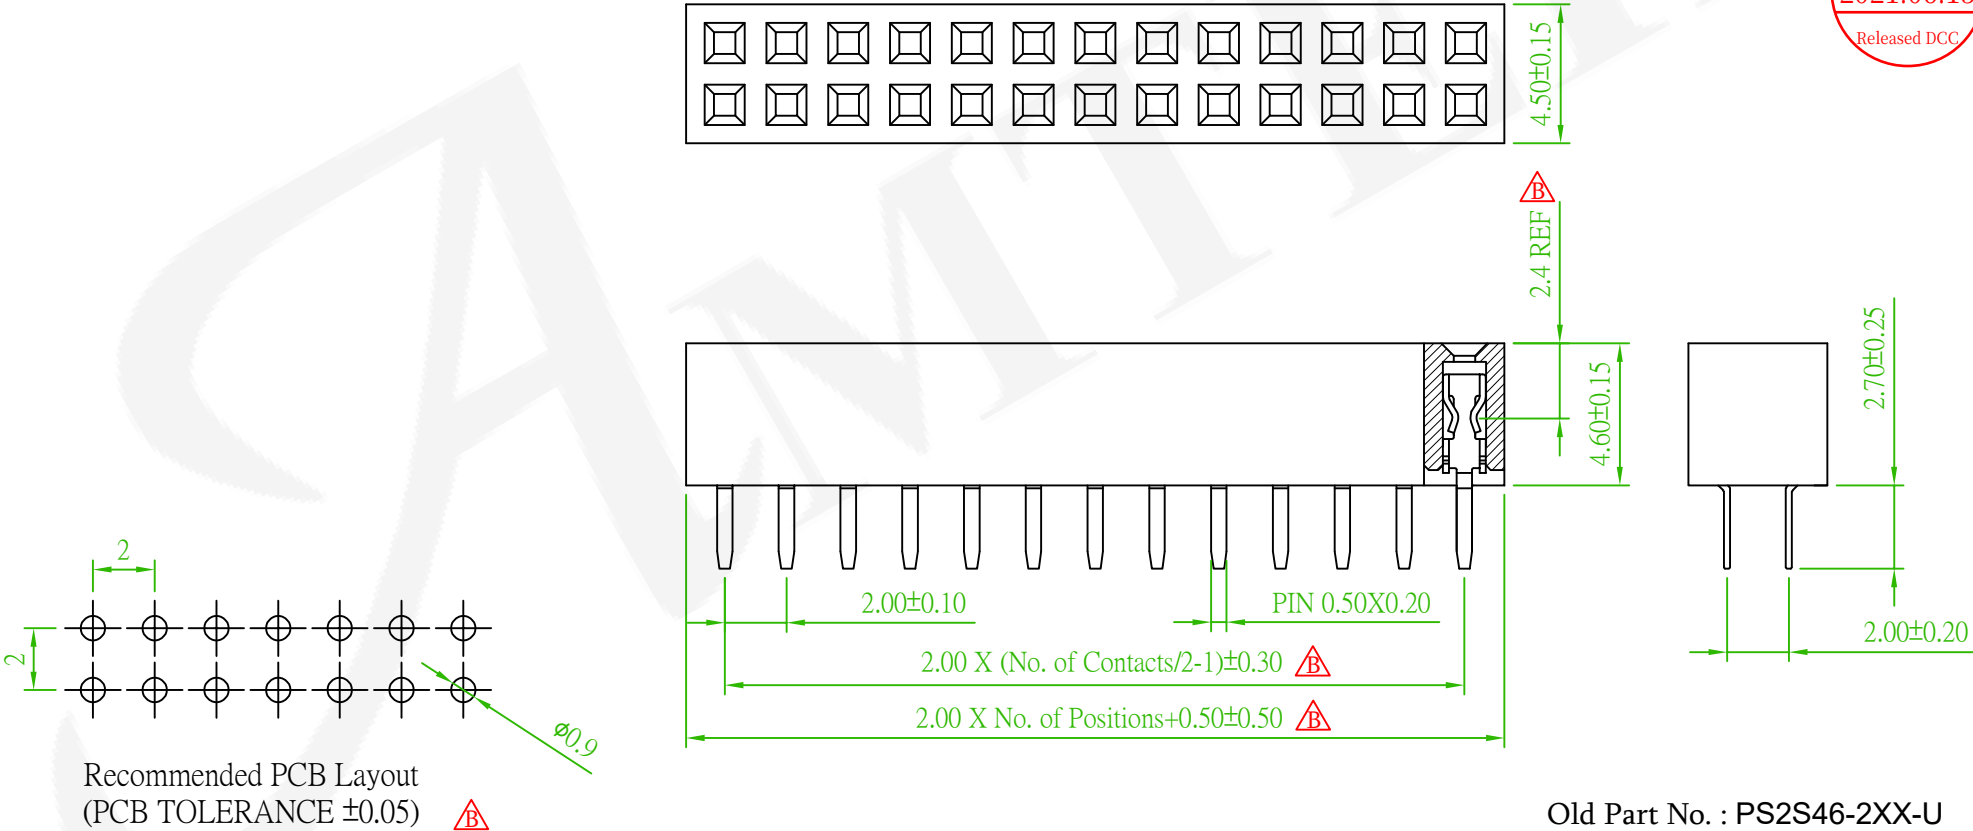

Old Part No. : PS2S46-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2SDA46-2XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/26
	圖號 DRAWING NO.	GN003-DW484	版本 REV.	B	核對 CHECKED	John 2015/08/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.210531:Revise the drawing	David	2021/06/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE